





Max Fastening Torque

140 N⋅m





Aluminum

hammer case

Anti-bit wobbling structure

- Two ball bearings are used to securely hold the anvil for reduced bit wobbling.
- Despite the internal design change for the rigidity, redesigned gear section makes the overall length 2mm shorter than Predecessor Model.

Slim body

Compact housing sizes around the motor allow for easy screwdriving in tight corners.



Best possible ergonomic handle for screwing applications



In order to provide maximum thrust to the bit, the top back of the handle is ergonomically contoured and widened to perfectly fit the U-shape formed between user's thumb and index finger.

Ribbed soft grip enables all finger tips to hold the handle securely against the strong rotational force of counter torque even in single-handed operation.

Impact power selection

Hard / Soft impact modes




Accessories

Tool hanger set

Part No. 191K57-9



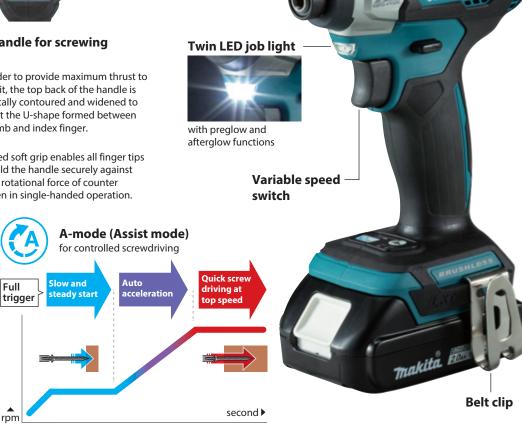



Charging Time Standard Charging DC18RC DC18SD **BL1815N** 1.5Ah 15 min 30 min BL1820B 2.0Ah **24** min 45 min BL1830B 3.0Ah **60** min 22 min BL1840B 4.0Ah $90\,\mathrm{min}$ 36_{min} BL1850B 5.0Ah 45 min 110 min BL1860B 6.0Ah 130 min 55 min

Cordless Impact Driver

DTD157RTJ / DTD157Z / DTD157RT1J

Variable Speed Marake Brake Built-in Job Light (266622-8) (tool does not

Reversing

Electronic 2-Speed

Carrying Case

come with bit).

Standard Equipment: Hook (346317-0), (+) truss head screw M4X12 Capacity

Hex Shank No Load Speed (RPM)

Impacts Per Minute (IPM) Max Fastening Torque Vibration Level

Sound Pressure Level Sound Power Level

Dimensions (L x W x H) Net weight

Machine Screw: M4 - M8 mm (5/32 - 5/16")

Machine Sciew, with - World mile (3/24 - 9/16") Standard Bolt: M5 - M14 (3/16 - 9/16") High Strength Bolt: M5 - M12 (3/16 - 1/2") Coarse thread (in length): 22 - 90 mm (7/8 - 3-1/2") 6.35 mm (1/4") Hard / Soft: 0 - 3,000 / 0 - 1,300 Hard / Soft: 0 - 4,100 / 0 - 2,000

140 N·m Impact tightening of fasteners of the maximum capacity of the

tool: 11.5 m/s² 95 dB(A) 106 dB(A) w/o Battery: 133 x 81 x 185 mm (5-1/4 x 3-3/16 x 7-1/4")

w/BL1830B/BL1840B/BL1850B/BL1860B: 133 x 81 x 232 mm 1.2 kg (BL1815N)- 1.5 kg (BL1860B) DTD 157RTJ: 2 batteries 5.0Ah BL 1850B, fast charger DC 18RC, connector plastic case type 2 (821550-0) DTD157Z: Battery & charger are sold seperately
DTD157RT1J: 1 battery 5.0Ah BL1850B, fast charger DC18RC, connector plastic case type 2 (821550-0)

MAKITA VIETNAM COMPANY LIMITED UNIT 4-56, Block 16, 181.12, Street No 3, VSIP II, Binh Duong Ward, Ho Chi Minin City Tel: 0214 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

MAKITA VIETNAM COMPANY LIMITED NORTH BRANCH

MAKITA VIETNAM COMPANY LIMITED - HANOI BRANCH MAKITA VIETNAM COMPANY LIMITED - CAN THO

CITY BRANCH CITY BRANCH 366 Vo Van Kiet Str Tel: 0292 389 4358 reet, Area 5, Binh Thuy Ward, Can Tho City

CITY BRANCH 68 Le Duc Tho. Buon Ma Thuot Ward. Dak Lak Province MAKITA VIETNAM COMPANY LIMITED - HAI PHONG

MAKITA VIETNAM COMPANY LIMITED - DA NANG MAKITA VIETNAM COMPANY LIMITED - BUON MA THUOT MAKITA VIETNAM COMPANY LIMITED - NHA TRANG CITY BRANCH Lot 36-38, B6 Street, Vinh Diem Trung Urban Area, Tay Nha Trang Ward, Khanh Hoa Province MAKITA VIETNAM COMPANY LIMITED - HO CHI MINH

CITY BRANCH 12 Trinh Van Can, Ben Thanh Ward, Ho Chi Minh City Tel: 0283 821 5191