

Accessories

- Standard equipment GA039G/GA042G
- Standard equipment GA041G/GA044G

Dust Collection wheel guard

for Diamond wheel
GA041G, GA044G,
GA047G only
Part No.
191G05-4



Wheel cover

for abrasive cut-off
wheel

Size	Part No.
100mm	162706-9
125mm	162708-5



Cutting W.C.A set

for abrasive cut-off
wheel

Size	Part No.
100mm	191V54-1
125mm	199710-5



Anti-vibration grip

Part No.
194514-0



Charging Time

		Fast Charging	
		DC40RA	DC40RC
BL4020	2.0Ah	22 min	30 min
*1 BL4025	2.5Ah	28 min	38 min
*1 BL4040	4.0Ah	45 min	67 min
*1 BL4050F	5.0Ah	50 min	85 min
BL4080F	8.0Ah	76 min	170 min

*1 Recommended battery

X-LOCK wheels

Grinding wheel / Metal

Size	Part No.
100mm	E-00480
125mm	E-00393



Grinding wheel / Stainless

Size	Part No.
100mm	E-00496
125mm	E-00402



Thin Cut-off wheel / Stainless (Flat)

Size	Part No.
100mm	E-00505
125mm	E-00418



Diamond wheel / Concrete

Size	Part No.
100mm	E-02054
125mm	E-02076



Slide Switch Type

AWS AFT X-LOCK XPT

	GA039GZ	GA041GZ
Wheel Diameter	100 mm (4")	125 mm (5")
Thread	X-LOCK	X-LOCK
No Load Speed (RPM)	3,000 - 8,500	3,000 - 8,500
Vibration Level	Surface Grinding w/ Normal Side Grip: 3.0 m/s ² Disc Sanding w/ Normal Side Grip: 2.5 m/s ² or less	4.2 m/s ² 2.5 m/s ²
Sound Pressure Level	79 dB(A)	80 dB(A)
Dimensions (L x W x H)	with/BL4025: 421 x 117 x 149 mm (16-1/2 x 4-5/8 x 5-7/8") with/BL4050F: 459 x 117 x 178 mm (18 x 4-5/8 x 7")	421 x 140 x 151 mm (16-1/2 x 5-1/2 x 5-15/16") 459 x 140 x 180 mm (18 x 5-1/2 x 7-1/8")
Net weight	3.0 - 5.3 kg (6.6 - 11.7 lbs.)	3.0 - 5.3 kg (6.6 - 11.7 lbs.)

- Variable Speed
- Brake
- Constant speed
- Soft Start
- Dust Collection
- Carrying Case

GA039GZ, GA041GZ: Battery & charger are sold separately

Standard equipment:

Wheel cover 100 (141L25-8 / GA039G), cutting
W.C.A 100 (191V54-1/GA039G), grip 36
(158237-4), grinding wheel INOX
(X-LOCK/100mm - E-00496/GA039G)

Wheel cover 125 (141L27-4 / GA041G), cutting
W.C.A 125mm (199710-5 / GA041G), grip 36
(158237-4), grinding wheel INOX
(X-LOCK/125mm - E-00402/GA041G)

Paddle Switch Type

AWS AFT X-LOCK XPT

	GA042GZ	GA044GZ
Wheel Diameter	100 mm (4")	125 mm (5")
Thread	X-LOCK	X-LOCK
No Load Speed (RPM)	3,000 - 8,500	3,000 - 8,500
Vibration Level	Surface Grinding w/ Normal Side Grip: 3.3 m/s ² Disc Sanding w/ Normal Side Grip: 2.5 m/s ² or less	4.5 m/s ² 2.5 m/s ² or less
Sound Pressure Level / Sound Power Level	81 dB(A) / 92 dB(A)	81 dB(A) / 92 dB(A)
Dimensions (L x W x H)	with/BL4025: 421 x 117 x 149 mm (16-1/2 x 4-5/8 x 5-7/8") with/BL4050F: 459 x 117 x 178 mm (18 x 4-5/8 x 7")	421 x 140 x 151 mm (16-1/2 x 5-1/2 x 5-15/16") 459 x 140 x 180 mm (18 x 5-1/2 x 7-1/8")
Net weight	3.0 - 5.4 kg (6.6 - 11.9 lbs.)	3.0 - 5.4 kg (6.6 - 11.9 lbs.)

- Variable Speed
- Brake
- Constant speed
- Soft Start
- Dust Collection
- Carrying Case

GA042GZ, GA044GZ: Battery & charger are sold separately

Standard equipment:

Wheel cover 100 (141L25-8 / GA042G), cutting
W.C.A 100 (191V54-1/GA042G), grip 36
(158237-4), grinding wheel INOX
(X-LOCK/100mm - E-00496/GA042G)

Wheel cover 125 (141L27-4 / GA044G), cutting
W.C.A 125mm (199710-5 / GA044G), grip 36
(158237-4), grinding wheel INOX
(X-LOCK/125mm - E-00402/GA044G)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

M4-052023-1

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 559, Block 16, 19L1-2 Đường số 3, KCN VSPP, P. Hòa Phú, TP. Thủ Đức, Bình Dương
ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC
Khu 5, Số 1, Đường Số 6, KCN - BT - DV VSPP Bắc Ninh, P. Phú Châu,
TP. Từ Sơn, T. Bắc Ninh.
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH ĐÀ NẴNG
102 Triều Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng.
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH BUỒN MA THUẬT
88 Lê Đức Thọ, P. Thủ Đức, TP. Thuận An, TP. Bình Dương, T. Bắc Lấp.
ĐT: 0262 355 4558 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH NHÀ TRANG
Lô 56-58 đường B6, Khu đô thị Vinh Diễm Trưng, Xã Vinh Ngọc,
TP. Nha Trang, T. Khánh Hòa
ĐT: 0258 220 0639

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HÀ NỘI
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội.
ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH CẦN THƠ
366 Võ Văn Kiệt, Khu Vực 5, P. An Thới, Q. Bình Thủy,
TP. Cần Thơ.
ĐT: 0292 389 4358 Fax: 0292 389 4358

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HẢI PHÒNG
Số 01 Lê Duẩn, Di An Hoàng Huy Riverside, P. Thượng Lý,
Q. Hồng Bàng, TP. Hải Phòng.
ĐT: 0283 821 5191

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HỒ CHÍ MINH
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh.
ĐT: 0283 821 5191



Just One Click
X-LOCK

Quick and Effortless Wheel Change System

Slide Switch with Electric brake, AWS
and Variable speed control by dial

GA039G 100mm
GA041G 125mm



Paddle Switch with Electric brake, AWS
and Variable speed control by dial

GA042G 100mm
GA044G 125mm



BL
MOTOR

High operating efficiency



XLOCK


Quick and Effortless Wheel Change System



Just one click to attach the accessories
easy removal just simply pull the lever


AFT Active Feedback sensing Technology

Shuts down the tool, if the rotation speed suddenly slows down.

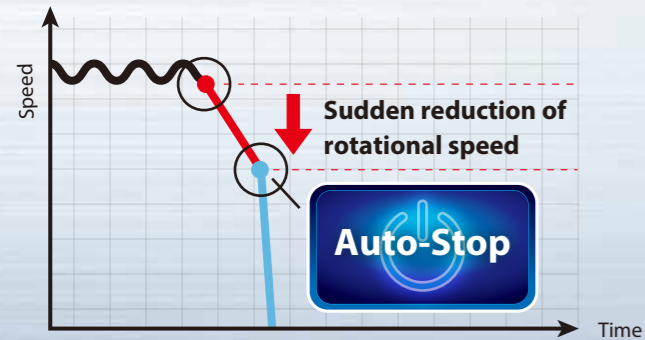

Variable speed control dial
(3,000 - 8,500 RPM)

Matches the speed to your application.



GA039G, GA041G, GA042G, GA044G

	No load speed (RPM)	Cutting / Rough grinding	Grinding / Finish grinding	Rust removal / Paint removal	Stainless steel polishing
1	3,000				✓
2	4,500			✓	✓
3	6,000		✓	✓	✓
4	7,500		✓		
5	8,500	✓			

AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth.
The vacuum cleaner automatically runs while the switch is on.



GA039G, GA040G, GA041G
GA042G, GA043G, GA044G only

Toolless wheel cover (Slide lever style)

allows for fast and easy angle adjustment and installation / removal of wheel cover.



No over-tightening

X-LOCK accessories are firmly attached and cannot be mounted incorrectly.




No downtime

of installing and removing the accessories. Improve your work efficiency and work environment



No tool required

X-LOCK mechanism ensures that the accessory is properly mounted to the tool even without nut, flange, and spanner.



No scratching workpiece

by nuts even when flat grinding.



Constant speed control

minimizes the reduction in wheel speed to provide stable grinding.



Electric brake
maximizes productivity and increases safety for operator



Extreme Protection Technology
is engineered for improved dust and water resistance

