

Accessories ● Standard equipment

Straight Guide with Micro Adjustment
Part No. 195136-9




To install the straight guide assembly and trimmer guide assembly

Holder Assembly
Part No. 122G61-3




Rod 8
L=255 mm L=450 mm
Part No. 256861-8 ● Part No. 195137-7
2 pieces required 2 pieces set



Straight Guide
Part No. 342428-9 ●
Use with Holder Assembly and Rod 8 x2



Trimmer Guide Assembly
Part No. 123022-4 / 122699-2
Use with Holder Assembly and Rod 8 x2



Guide Rail Adapter
(Use with Guide Rail)
Part No. 194579-2



Guide Rail
(Use with Guide Rail Adapter)



Length	Part No.
1.0 m	199140-0
1.4 m	194368-5 / 191J17-5
1.5 m	199141-8
1.9 m	194925-9 / 194926-7
3.0 m	194367-7



Clamp Set
(Use with Guide Rail)
Standard type
Part No. 194385-5




Quick type
Part No. 199826-6



Push clamp type
Part No. 1913K5-7



Dust Nozzle
Part No. 194934-8



Collet Cone

Size	Part No.
1/2" (12.7 mm)	763622-4 ●
12 mm	763628-2
13 mm	763632-1



Collet Sleeve

For the use of bits with smaller diameters

From	To	Part No.
1/4" (6.35 mm)	3/8" (9.53 mm)	763803-0 / 763809-8 ●
1/2" (12.7 mm)	3/8" (9.53 mm)	763805-6 / 763810-3 ●
10 mm		763806-4
6 mm		763801-4 / 763811-1
6.35 mm		763808-0
12 mm	8 mm	763804-8 / 763812-9 A-86206
10 mm		763807-2



Templet Guide
(For fast production of complicated shapes by using templets.)



A (mm)	B (mm)	C (mm)	Part No.
7.7	9.5	11.5	164379-4
9	11	13	164775-6
10	12	9	164388-3
11	12.7	13	164776-4
14	17	20	165366-6
14.5	16	13	344364-5 / 345387-6 ●
			193043-0
18	20	13	164393-0
22	24	13	165364-0
24	27	13	164470-8 / A-86212
25	29	15	163080-8
27	30	13	164471-6
37	40	13	164472-4 / 165046-4

Charging Time

Battery	Fast Charging		Standard Charging	
	DC40RA	DC40RC	DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min	28 min	38 min
*1 BL4040/F 4.0Ah	45 min	67 min	45 min	67 min
*1 BL4050F 5.0Ah	50 min	85 min	50 min	85 min
BL4080F 8.0Ah	76 min	170 min	76 min	170 min

*1 Recommended battery

Cordless Router

RP001GZ 12.7 mm (1/2")

Variable Speed	Collet size	12.7 mm (1/2")
Brake	Base size	150 x 130 mm
Constant Speed	Plunge capacity	60 mm (2-3/8")
Soft Start	No load speed	8,000-25,000 min ⁻¹
Dust Collection	Vibration level	6.3 m/s ²
Built-in Job Light	Sound pressure level	92 dB(A)
Anti-restart function	Sound power level	100 dB(A)
Carrying Case	Dimensions (L x W x H)	135 x 275 x 288 mm
	Net weight	4.0 kg (BL4020) - 5.2 kg (BL4080F)

RP001GZ: Battery & charger are sold separately
Standard Equipment :
Collet cone 1/2" (763622-4), collet nut (763629-0), holder assembly (122G61-3), dust nozzle ass'y (122850-4), templet guide 16 (345387-6), collet sleeve 6.35 (763809-8), collet sleeve 9.53 (763810-3), wrench 8-24 (781034-9), chip deflector (4130A9-4), rod 8 (256861-8), straight guide (342428-9)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area. A3-05/2024-1

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 4-56, Block 16, 18/1/2 Đường số 3, KCN VSPP, P. Hòa Phú, TP. Thủ Đức, Bình Dương
ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn


CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC
Khu 5, Số 1, Đường Số 6, KCN - DT - DV VSPP Bắc Ninh, P. Phú Châu, TP. Từ Sơn, T. Bắc Ninh.
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH ĐÀ NẴNG
Số 40, Đường Chi Lăng, P. Hải Châu, Q. Hải Châu, TP. Đà Nẵng.
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5479

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH CẦN THƠ
399 Võ Văn Kiệt, Khu Vực S. P. An Thới, Q. Bình Thủy, TP. Cần Thơ.
ĐT: 0292 389 4358 Fax: 0292 389 4359

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HẢI PHÒNG
Số 01 Lê Đại Hành, Di An Hoàng Huy Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng.
ĐT: 0225 883 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HÀ NỘI
Số 01 Lê Đại Hành, Di An Hoàng Huy Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng.
ĐT: 0283 821 5181

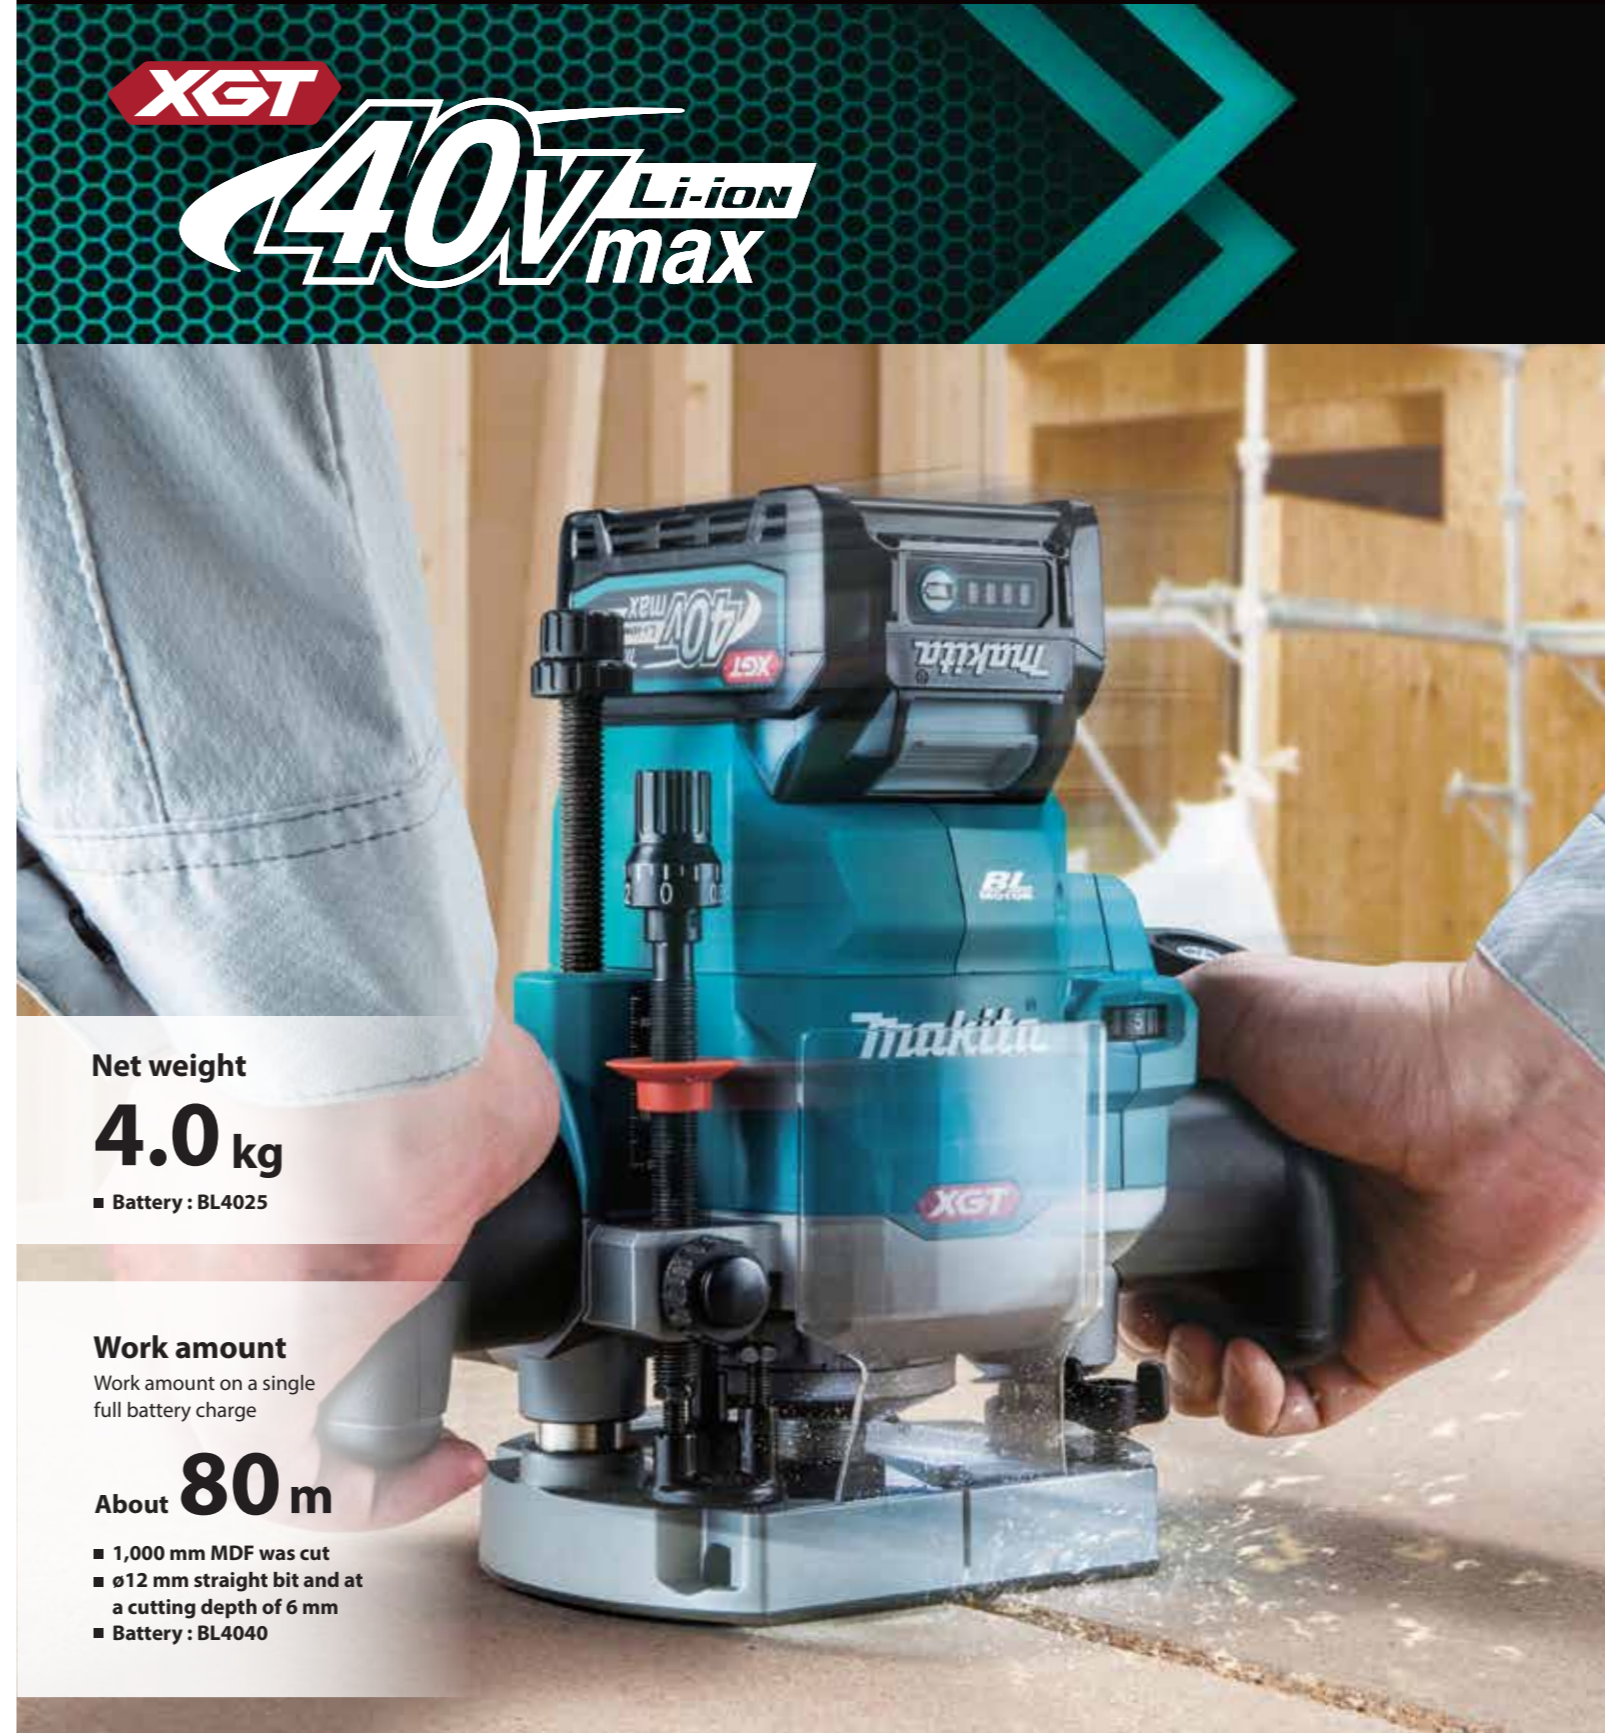

Net weight
4.0 kg
■ Battery : BL4025


Work amount
Work amount on a single full battery charge
About 80 m

- 1,000 mm MDF was cut
- ø12 mm straight bit and at a cutting depth of 6 mm
- Battery : BL4040

Excellent combination of high efficiency and lightweight design

Lightweight design

Net weight
4.0 kg
(with BL4025)

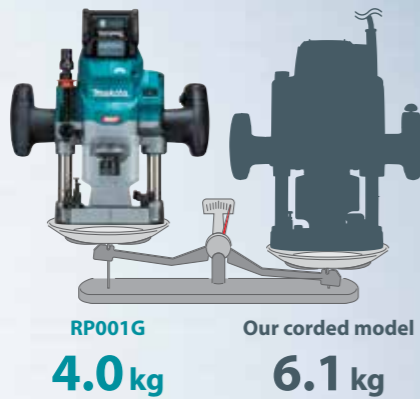

Low overall height


Overall height
Lower dead point
228 mm
(with BL4025)



High power Brushless motor



Simpler switch operation



Ergonomically designed Knob style handles for comfortable operation



Speed control dial

Enables selection of the rotation speed to suit various workpieces.

Number	Speed
1	8,000 min ⁻¹
2	12,500 min ⁻¹
3	17,000 min ⁻¹
4	21,000 min ⁻¹
5	25,000 min ⁻¹



AWS Auto-start Wireless System

Connects to compatible vacuum cleaners with Bluetooth. The vacuum cleaner automatically runs while the switch is on.

Bluetooth



Lock lever

Enables easy depth locking.



3 stage cut depth adjustment

Select the stopper screw by rotating the stopper base.



Shaft lock

The flat-top design provides stability, making bit changes easier.



LED job light

A press of the Lock-off button turns the tool on in the standby mode and with the LED job light on for better view of the cutting position.



Can be connected to Vacuum with Dust nozzle and Hose.



Soft start and soft brake

Prevents damage to the workpiece material due to recoil.

Compatible with 12 mm or 1/2" Collet chuck



XPT

(eXtreme Protection Technology)

