

Accessories

Standard Equipment

Glass protection nozzle

Part No. PR00000028

Ideal for drying putty while protecting glass, and protecting windows when stripping frames



Wide-slot nozzle

Part No. PR00000029

Ideal for applications such as PVC packing



Reflector nozzle

Part No. PR00000030

Ideal for soldering and shrink fitting plastic soldering sleeves, and bending plastic welding rods



Reduction nozzle 20mm

Part No. PR00000031

Provides concentrated heating over a small area



Overlap welding nozzle

Part No. PR00000032

For patching a vinyl sheet with the optional pressure roller



Solder sleeves reflector

Part No. PR00000033

Ideal for heating heat shrink tubing



Welding nozzle

Part No. PR00000034

Ideal for placing an accurate heat beam



Pressure roller

Part No. PR00000035

Ideal for securing material while being heated



Speed welding nozzle

Part No. PR00000039

Conveniently holds a plastic welding rod while speed welding (welding rod not included)



Welding rods

Part No. ABS: PR00000036
HDPE: PR00000037
PP: PR00000038



Scraper

Part No. PR00000040

Ideal for stripping paint and varnish



Scraper set

Part No. PR00000041

Ideal for stripping paint and varnish



Cordless Heat Gun Series

DHG181



Air volume	70/110 L/min
Air temperature	Up to 550 °C

DHG180



Air volume	110 L/min
Air temperature	Up to 550 °C



Charging Time

	Fast Charging		Standard Charging	
	DC40RA	DC40RC	DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min		
*1 BL4025 2.5Ah	28 min	38 min		
*1 BL4040/F 4.0Ah	45 min	67 min		
*1 BL4050F 5.0Ah	50 min	85 min		
*1 BL4080F/H 8.0Ah	76 min	170 min		

*1 Recommended battery

Cordless Heat Gun

HG001GZ02

- Anti-restart function
- Electronic 4-Speed
- Constant Speed
- Built-in Job Light
- Carrying Case

Air temperature	Ambient temperature (blowing) - 600 °C (1,112.0 °F)
Air volume	120 / 150 / 180 / 200 L/min
Continuous use (Battery)	14 min. BL4040
(Other conditions)	600°C, 200 L/min
Nozzle fitting diameter	34.5 mm
Dimensions (L x W x H)	191 x 86 x 272 mm (BL4040)
Net weight	1.5 kg (BL4020) - 2.7 kg (BL4080F)

HG001GZ02: Battery & charger are sold separately.
Standard Equipment:
Connector plastic case (type 3)(821551-8), glass protection nozzle (PR00000028), wide-slot nozzle (PR00000029), reflector nozzle (PR00000030), reduction nozzle 20mm (PR00000031).

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area. (X3-020251)

MAKITA VIETNAM COMPANY LIMITED

UNIT 4-5-6, Block 16, 18L1-2, Street No 3, VSP2, Binh Duong Ward, Ho Chi Minh City

Tel: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

MAKITA VIETNAM COMPANY LIMITED NORTH BRANCH
Unit 5, No.1, Road 6, Vspj Industrial Park, Tu Son Ward, Bac Ninh Province
Tel: 0222 376 5942

MAKITA VIETNAM COMPANY LIMITED - DA NANG CITY BRANCH
40 Chi Lang, Hai Chau Ward, Da Nang City
Tel: 0236 3525 179

MAKITA VIETNAM COMPANY LIMITED - BUON MA THUOT CITY BRANCH
68 Le Duc Tho, Buon Ma Thuot Ward, Dak Lak Province
Tel: 0262 355 4556

MAKITA VIETNAM COMPANY LIMITED - NHA TRANG CITY BRANCH
Lot 35-38, 86 Street, Vinh Diem Trung Urban Area, Tay Hoa Trang Ward, Khanh Hoa Province
Tel: 0258 220 0039

MAKITA VIETNAM COMPANY LIMITED - HANOI BRANCH
Group 15 and No.4 Alley 63 Truong Chinh Street, Phuong Liet Ward, Hanoi City
Tel: 0243 202 2585

MAKITA VIETNAM COMPANY LIMITED - CAN THO CITY BRANCH
368 Vo Van Kiet Street, Area 5, Binh Thuy Ward, Can Tho City
Tel: 0292 389 4338

MAKITA VIETNAM COMPANY LIMITED - HAI PHONG CITY BRANCH
No 01, Lot 01-01, Hoang Huy Riverside, Hong Bang Ward, Hai Phong City
Tel: 0225 883 1529

MAKITA VIETNAM COMPANY LIMITED - HO CHI MINH CITY BRANCH
12 Trinh Van Can, Ben Thanh Ward, Ho Chi Minh City
Tel: 0283 821 5191



Cordless Heat Gun HG001G



Maximum air volume
200 L/min

Maximum temperature
600 °C



For installing vehicle wrap films



For connecting hoses



For applying adhesive vinyl sheets



For heating and shrinking heat-shrink tubing

Delivers excellent efficiency for demanding tasks

Maximum temperature


600°C

*Compared to our 18V models

Maximum air volume

200 L/min

*Compared to our 18V models

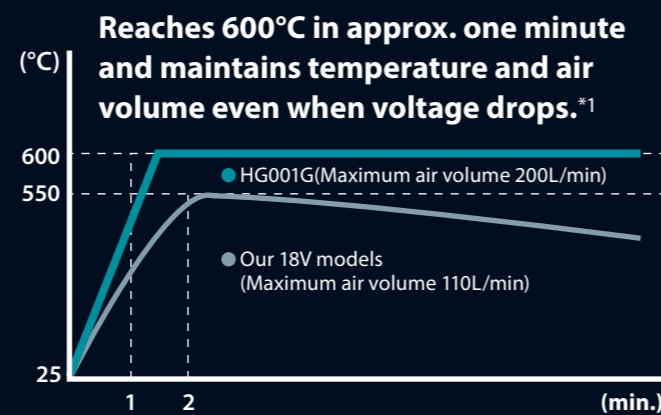

*1 Time to reach 600°C may vary depending on ambient temperature and battery condition.

LCD screen with backlight



- Memory function: Remembers the last used temperature and air volume settings.
- Maximum temperature control function

Temperature adjustment*2

COOL mode (fan only) and heating range from 50°C to 600°C.



*2 Actual temperature at the nozzle tip may vary depending on the working environment and usage conditions.

Air volume adjustment

Switchable in four steps.

1	120L/min	2	150L/min
3	180L/min	4	200L/min

Standard nozzles



Wide-slot nozzle
Ideal for applications such as PVC packing.



Glass protection nozzle
Ideal for drying putty while protecting glass, and protecting windows when stripping frames.



Reflector nozzle
Ideal for soldering and shrink fitting plastic soldering sleeves, and bending plastic welding rods.



Reduction nozzle 20mm
Provides concentrated heating over a small area.

Nozzle quick release

The quick-release mechanism allows tool-free nozzle removal without touching hot metal parts.



LCD display



Lock-off lever
Switch trigger

Hook



Lock-on button

Can be placed vertically



LED job light

