

Accessories **Standard equipment**

Adapter set

An attachment installed on the tip of the flexible hose to connect to the grease supply port.

1 pc
Part No. 1915L9-8

3 pcs
Part No. 1915M0-3



Angle adapter set

Part No. 1916U8-9

90° grease coupler for hard-to-reach grease nipples



Lock on adapter set

Part No. 1915N4-2

Locking grease coupler for a more secure connection to the grease nipple of a machine to be lubricated.



Flexible hose

Grease supply hose

1200 set
Length: 1,200 mm

Part No. 1916S5-1



600 set
Length: 600 mm

Part No. 1916S7-7



Extension pipe set

Part No. 1911M9-1

Convenient for connecting to the lubrication points in recessed places.



Loader fitting set

Part No. 1914G9-7

To pump up grease from a pail can for machine lubrication



Joint set

Part No. 1915E6-5

A joint for connecting a 500 g grease cartridge to the tool.



Charging Time

	Fast Charging		Standard Charging	
	DC40RA	DC40RC	DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min		
*1 BL4025 2.5Ah	28 min	38 min		
*1 BL4040 4.0Ah	45 min	67 min		
BL4050F 5.0Ah	50 min	85 min		
BL4080F 8.0Ah	76 min	170 min		

*1 Recommended battery

Cordless Grease Gun

GP001GZ

- Variable Speed
- Brake
- Anti-restart function
- Constant Speed
- Built-in Job Light
- Carrying Case

Grease capacity w/ Barrel A	Cartridge / Bulk: 410 / 455 g (14.5 / 16.0 oz)
Flow rate	Mode 1: 145 mL/min (5.0 oz/min) Mode 2: 220 mL/min (7.5 oz/min) Mode 3: 290 mL/min (10.0 oz/min) Mode 4: 350 mL/min (12.0 oz/min)
Applicable grease (NLGI grade)	No.0 - No.2
Max operating pressure	69 MPa
Flexible hose length	1,200 mm
Vibration level	2.5 m/s ² or less (EN62841-1)
Sound pressure level	81 dB (A) (EN62841-1)
Sound power level	89 dB (A) (EN62841-1)
Dimensions (L x W x H)	395 x 112 x 245 mm (BL4025)
Net weight	5.2 kg (BL4020) - 6.5 kg (BL4080F)

GP001GZ: Battery & charger are sold separately.

Standard Equipment: Flexible hose 1200 set (1916S5-1), shoulder belt (166094-6)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area. A3-092025-1

MAKITA VIETNAM COMPANY LIMITED

Unit 5, No.1, Road 6, Vajp Industrial Park, Tu Son Ward, Bac Ninh Province, Tel: 0222 376 9942

MAKITA VIETNAM COMPANY LIMITED NORTH BRANCH
Unit 5, No.1, Road 6, Vajp Industrial Park, Tu Son Ward, Bac Ninh Province, Tel: 0222 376 9942

MAKITA VIETNAM COMPANY LIMITED - DA NANG CITY BRANCH
40 Chi Lang, Hai Chau Ward, Da Nang City, Tel: 0238 3529 170

MAKITA VIETNAM COMPANY LIMITED - BUON MA THUOT CITY BRANCH
68 Le Duc Tho, Buon Ma Thuot Ward, Dak Lak Province, Tel: 0262 305 4536

MAKITA VIETNAM COMPANY LIMITED - NHA TRANG CITY BRANCH
Lot 26-38, 86 Street, Vinh Diem Trung Urban Area, Tay Nha Trang Ward, Khanh Hoa Province, Tel: 0259 220 0038

MAKITA VIETNAM COMPANY LIMITED - HANOI BRANCH
Group 15 and No.4 Alley 63 Truong Chinh Street, Phuong Liet Ward, Hanoi City, Tel: 0243 202 2585

MAKITA VIETNAM COMPANY LIMITED - CAN THO CITY BRANCH
366 Vo Van Kiet Street, Area 5, Binh Thuy Ward, Can Tho City, Tel: 0292 369 4556

MAKITA VIETNAM COMPANY LIMITED - HAI PHONG CITY BRANCH
No 01, Lot 04/01, Hoang Hai Riverside, Hong Bang Ward, Hai Phong City, Tel: 0225 863 1529

MAKITA VIETNAM COMPANY LIMITED - HO CHI MINH CITY BRANCH
12 Trinh Van Can, Ben Thanh Ward, Ho Chi Minh City, Tel: 0283 821 5191



Cordless Grease Gun
GP001G



Stable discharge even under high-pressure operation



Track tensioning operation for heavy machinery

Max flow rate
350 mL/min

Max operating pressure
69 MPa




Delivers stable high-speed discharge under high pressure




Work efficiency increased by about
175%
At high-pressure (40 MPa)
* Compared to our 18V model

Flow rate at high-pressure (40 MPa)
Grease used: Makita grease N No. 2

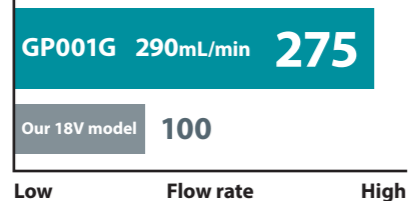

Constant speed control ensures stable discharge.

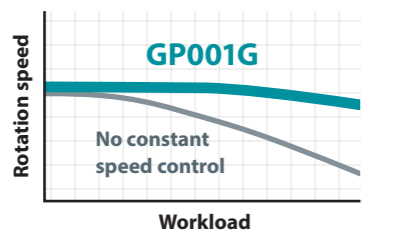

Fixed-quantity discharge mode

Ensures precise greasing at multiple points

Stops automatically after the preset number of strokes.

Quick, precise multi-point greasing with no need to check grease volume.



For greasing agricultural machinery and heavy equipment




Discharge speed selection [4 stages]



Discharge speed display
Speed mode changing / Light button

Flow rate [mL/min]			
Mode 1	Mode 2	Mode 3	Mode 4
145	220	290	350

Air lock detection function




Blinks when no grease is discharged after switch operation

Easier bellows cartridge replacement



Redesigned lower housing and wider opening for easier bellows cartridge changes.

Reduced air lock frequency



Shorter grease path reduces air lock during cartridge replacement.

Variable speed trigger
Discharge volume can be adjusted by trigger pull.

Lock button
Makes continuous greasing easier by locking the trigger.

Twin LED job light



Flexible hose
For easy operation in tight spaces

Shoulder strap compatible
(Standard equipment)



Bulk grease is directly loadable into the barrel.

Trigger lock button
Prevents accidental trigger operation.



XPT

Enhanced dust and water resistance in harsh outdoor environments



Compatible with various grease cartridges
Both narrow and wide barrels are available to suit grease cartridges used in different regions.