



# Adaptable for various tasks with a wide range of accessories



Wood cutting

Cutout in the flooring

Creating openings

Wood sanding

Flush rebar cutting

Flush copper pipe cutting

PVC pipe cutting

Tile removal

Tile grout removal

Elastic sealant removal

## Cutting depth adjustment



Keeps the cutting depth constant, reducing the risk of damaging hidden objects.  
Adjustment range: 0 - 50 mm

Cutting plasterboard

## Cutting height adjustment



Keeps the cutting height constant, allowing cuts at the desired height without using a support block.  
Adjustment range: 8 - 95 mm

Cutting finishing materials




### High-power brushless motor + constant speed control

The motor maintains its speed under load, allowing for stable work.



### Slim, easy-to-hold grip

Comfortable handling with a 139 mm grip circumference

Work efficiency increased by approx. **20%**  
\* Compared to our 18V model

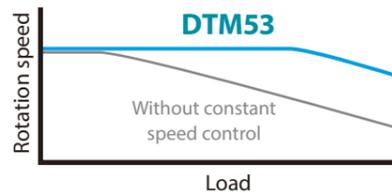

Slimmed down by **56 mm** in grip circumference  
\* Compared to our 18V model

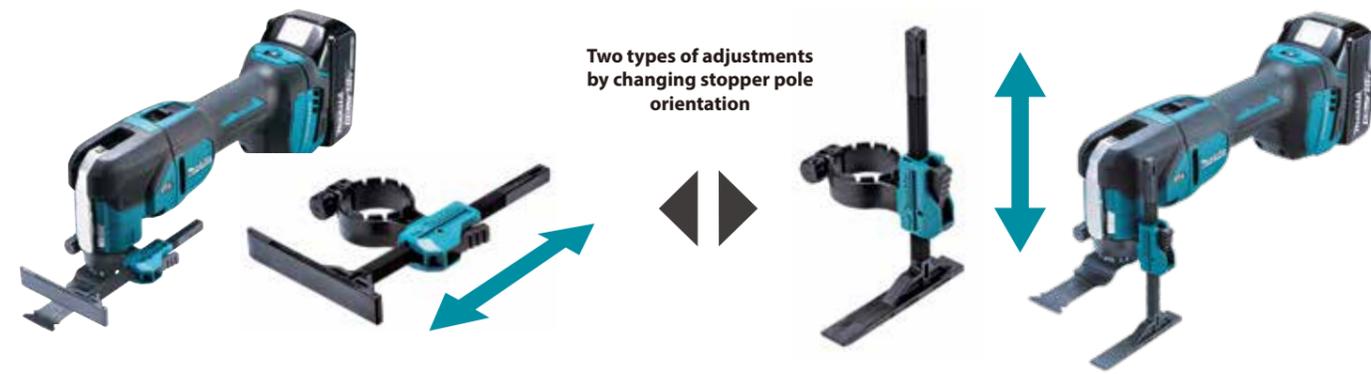

### Depth gauge assembly set **Optional accessory**

Enables operation at the desired cutting depth or height.



**STARLOCK**  
Compatible with STARLOCK




Oscillation angle **3.2 degrees**

Max. oscillations per minute


**20,000 min<sup>-1</sup>**

### Tool-less easy accessory change

1. Insert the holder bolt.
2. Close the lever to fix the accessory.

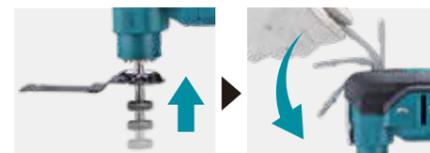

### 12 angle settings of accessory at every 30° from 0° to 360°



### Dust attachment set **Optional accessory**

Enables dust collection during sanding by connecting a vacuum hose.

