

Combination Hammer and Rotary Hammer with Dust collection system series

40V max

HR008G+DX10
Capacity: 30mm
Impact energy: 3.9 J



40V max

HR007G+DX15
Capacity: 28mm
Impact energy: 3.0 J



Accessories

HEPA Filter set

Part No.
199596-7

HEPA
filter



Dust cup set

For drilling

Part No.
HR011G: 1914L7-6
HR012G: 1914L8-4



Dust cup set

For hammering

Part No.
HR011G: 1914L9-2
HR012G: 1914M0-7



Keyless drill chuck set

Part No.

194254-0



Hook set

Part No.
191W90-3



Grease vessel set

Part No.
198993-4



Wireless unit set

Part No.
199393-1



Drill chuck set

Part No.

194041-7



Charging Time

	Fast Charging DC40RA	Standard Charging DC40RC
* ¹ BL4020 2.0Ah	22 min	30 min
* ¹ BL4025 2.5Ah	28 min	38 min
* ¹ BL4040/F 4.0Ah	45 min	67 min
BL4050F 5.0Ah	50 min	85 min
BL4080F/H 8.0Ah	76 min	170 min

*¹ Recommended battery

Cordless Combination Hammer

HR011G 28 mm (1-1/8") Adapted for SDS-PLUS bits

	Brake	Blows per minute 0 - 5,000 min ⁻¹ No load speed 0 - 1,130 min ⁻¹
	Reversing	Capacity Concrete (w/ TCT bit): 28 mm Steel: 13 mm Wood: 32 mm
	Anti-restart function	Impact energy 3.3 J Vibration level * 10.5 m/s ² (Mode: Hammer drilling into concrete) 11.0 m/s ² (Mode: Hammer drilling into concrete with DX17) 7.3 m/s ² (Mode: Chiselling)
	Electronic 4-Speed	Uncertainty (K) for Vibration * 1.5 m/s ² (Mode: Hammer drilling into concrete) 1.5 m/s ² (Mode: Hammer drilling into concrete with DX17) 1.5 m/s ² (Mode: Chiselling)
	Adapted for SDS-PLUS bits	Sound pressure level* 97 dB(A), 98 dB(A) (with DX17)
	Torque Limiter	Sound power level* 105 dB(A), 105 dB(A) (with DX17)
	Constant Speed	Uncertainty (K) for Noise* 3 dB(A), 3 dB(A) (with DX17)
	Dust Collection	Dimensions (L x W x H) 391 x 104 x 223 mm (BL4040) Net weight 3.8kg (BL4020) - 5.5 kg (BL4080F)
	Built-in Job Light	HR011G: Battery & charger are sold separately.
	Carrying Case	Standard Equipment: Grip assembly (122K22-7), depth gauge (331886-4), grease vessel (194683-7).

*EN62841-2-6

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual.

Items of standard equipment and specifications may vary by country or area.

A3-122025-1

MAKITA VIETNAM COMPANY LIMITED

MAKITA VIETNAM COMPANY LIMITED - DA NANG

MAKITA VIETNAM COMPANY LIMITED - BUON MA THUOT

MAKITA VIETNAM COMPANY LIMITED - NHA TRANG

MAKITA VIETNAM COMPANY LIMITED NORTH BRANCH
Unit 5, No1, Road 6, Vip Industrial Park, Tu Son Ward,
Bac Ninh Province

MAKITA VIETNAM COMPANY LIMITED - CITY BRANCH
40 Chi Lang, Hai Chau Ward, Da Nang City
Tel: 0222 378 5942

MAKITA VIETNAM COMPANY LIMITED - CAN THO
366 Vu Van Kiet Street, Area 5, Binh Thuy Ward, Can Tho City
Tel: 0292 389 4358

MAKITA VIETNAM COMPANY LIMITED - CITY BRANCH
68 Le Duc Tho, Buon Ma Thuot Ward, Dak Lak Province
Tel: 0236 355 4556

MAKITA VIETNAM COMPANY LIMITED - HAI PHONG
CITY BRANCH
No 01, Let OH-01, Hoang Huy Riverside, Hong Bang Ward, Hai Phong City
Tel: 0225 883 1529

MAKITA VIETNAM COMPANY LIMITED - CITY BRANCH
12 Tran Van Can, Ben Thanh Ward, Ho Chi Minh City
Tel: 0283 821 5191

Satisfy Professional's Needs

XGT

Combination Hammer and Rotary Hammer with Dust collection system series

40V max

HR008G+DX10
Capacity: 30mm
Impact energy: 3.9 J



40V max

HR007G+DX15
Capacity: 28mm
Impact energy: 3.0 J



Accessories

HEPA Filter set

Part No.

199596-7

HEPA
filter



Dust cup set

For drilling

Part No.
HR011G: 1914L7-6
HR012G: 1914L8-4



Dust cup set

For hammering

Part No.
HR011G: 1914L9-2
HR012G: 1914M0-7



Keyless drill chuck set

Part No.

194254-0



Hook set

Part No.

191W90-3



Grease vessel set

Part No.
198993-4



Wireless unit set

Part No.
199393-1



Drill chuck set

Part No.

194041-7



Charging Time

	Fast Charging DC40RA	Standard Charging DC40RC
* ¹ BL4020 2.0Ah	22 min	30 min
* ¹ BL4025 2.5Ah	28 min	38 min
* ¹ BL4040/F 4.0Ah	45 min	67 min
BL4050F 5.0Ah	50 min	85 min
BL4080F/H 8.0Ah	76 min	170 min

*¹ Recommended battery

Cordless Combination Hammer

HR011G 28 mm (1-1/8") Adapted for SDS-PLUS bits

	Brake	Blows per minute 0 - 5,000 min ⁻¹ No load speed 0 - 1,130 min ⁻¹
	Reversing	Capacity Concrete (w/ TCT bit): 28 mm Steel: 13 mm Wood: 32 mm
	Anti-restart function	Impact energy 3.3 J Vibration level * 10.5 m/s ² (Mode: Hammer drilling into concrete) 11.0 m/s ² (Mode: Hammer drilling into concrete with DX17) 7.3 m/s ² (Mode: Chiselling)
	Electronic 4-Speed	Uncertainty (K) for Vibration * 1.5 m/s ² (Mode: Hammer drilling into concrete) 1.5 m/s ² (Mode: Hammer drilling into concrete with DX17) 1.5 m/s ² (Mode: Chiselling)
	Adapted for SDS-PLUS bits	Sound pressure level* 97 dB(A), 98 dB(A) (with DX17)
	Torque Limiter	Sound power level* 105 dB(A), 105 dB(A) (with DX17)
	Constant Speed	Uncertainty (K) for Noise* 3 dB(A), 3 dB(A) (with DX17)
	Dust Collection	Dimensions (L x W x H) 391 x 104 x 223 mm (BL4040) Net weight 3.8kg (BL4020) - 5.5 kg (BL4080F)
	Built-in Job Light	HR011G: Battery & charger are sold separately.
	Carrying Case	Standard Equipment: Grip assembly (122K22-7), depth gauge (331886-4), grease vessel (194683-7).

*EN62841-2-6

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual.

Items of standard equipment and specifications may vary by country or area.



Enhanced drilling efficiency with excellent maneuverability

Maximum drilling efficiency in its class*

* In the category of 28 mm-class cordless hammer drills with SDS-plus shank. According to our research as of November 2025.

Drilling efficiency increased by about **30 %**
Compared to our previous model

Drill diameter: **ø16.0 mm**
Depth: **60 mm**
Concrete with compressive strength of **40 N/mm²**
HR011G 130
Our previous model **100**
Slow Drilling efficiency Fast



Compact and lightweight
600 g lighter than our previous model



Filter cleaning
Turning the dial removes dust from the filter and restores dust collection performance.

Our previous model

* With the dust collection system installed

Photo: HR011G + DX17

BL MOTOR
High-power brushless motor

XPT
High water-resistance compatible with XPT (eXtreme Protection Technology)

Photo: HR011G + DX17

AVT
Anti-Vibration Technology

Low vibration


HR011G
• Hammer drilling into concrete: **10.5 m/s²**
Hammer drilling into concrete with DX17: **11.0 m/s²**
• Chiselling: **7.3 m/s²**

Minimizing user strain during continuous operation.



AFT
Active Feedback sensing Technology

Turns the motor off if bit rotation is suddenly forced to stop.

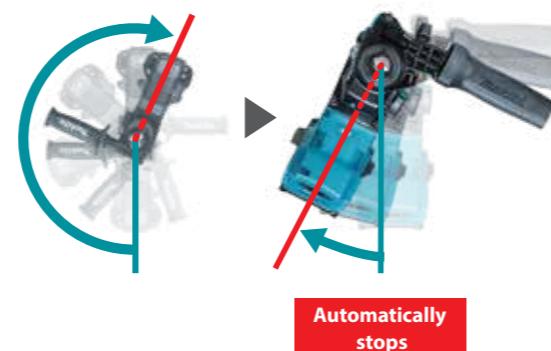


AWS
Auto-start Wireless System

Connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.



Three operation modes

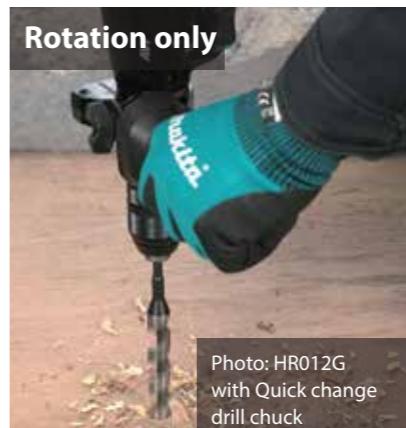

Electronic speed switch
From heavy-duty tasks to delicate tasks



Speed indicator	Blows per min: min ⁻¹	Recommended application
4	5,000	Drilling, chiseling and chipping work
3	4,250	Scraping and chiseling work
2	3,250	Reducing breakage and wear when drilling with small-diameter bits
1	1,400	Minimizing edge chipping when drilling into tiles



Dust collection system DX17
Clean operation with excellent maneuverability



New light structure

By adopting a light-guiding structure that directs the tool's LED light to the front of the dust collection system, the need for an LED light and LED circuit within the system is eliminated.

