

## VS001G

### Cordless Vacuum Sweeper

1. Capable of cleaning dust or waste of all sizes
2. Dust container capacity 24L

Dust pickup rate

about

**90%**

Cleaning width with Side brush

**650 mm**



#### Accessories Standard Equipment:

##### Flat nozzle set

Part No. 1916V7-8



##### Gutter nozzle set

Part No. 191B03-8



##### Adapter pipe 80-72 set

Part No. 191L13-5



For connecting the gutter nozzle set

##### Vacuum kit set

Part No. 1916T9-0



Capacity: 50 L

##### Dust bag set

Part No. 191P40-6



Capacity: 25 L

#### Charging Time

	Fast Charging DC40RA	Standard Charging DC40RC
BL4020 2.0Ah	22 min	30 min
BL4025 2.5Ah	28 min	38 min
BL4040 4.0Ah	45 min	67 min
*1BL4040F 4.0Ah	45 min	67 min
*1BL4050F 5.0Ah	50 min	85 min
*1BL4080F/H 8.0Ah	76 min	170 min

\*1 Recommended battery

#### Cordless Blower

##### UB003GZ

- Variable Speed
- Brake
- Anti-restart function
- Constant Speed

Blower function	Max blowing force: 7 / 16N Max air volume: 9.4 / 13.8 m <sup>3</sup> /min Max air velocity: 0 - 46 / 68 m/s Avg. air velocity: 0 - 38 / 56 m/s Continuous use: 30 / 9 min (BL4050F)
Vacuum function	Max air volume: 13.0 m <sup>3</sup> /min Max sealed suction: 3.3 kPa Dust bag capacity: 50 L Continuous use: 30 / 9 min (BL4050F)
Sound pressure level	86.8dB(A) (EN IEC 62841-4-6)
Sound power level	97.3dB(A) (EN IEC 62841-4-6)
Vibration level	2.0m/s <sup>2</sup> (EN IEC 62841-4-6)
Dimensions (L x W x H)	699 - 830 x 201 x 400 mm (With the blower nozzle at shortest to longest, w/o the vacuum kit)
Net weight	5.0 kg - 6.1 kg (BL4050F) Min: with the blower pipe and nozzle, Max: with the vacuum kit

UB003GZ: Battery & charger are sold separately.  
Standard Equipment: Blower pipe assembly (122J57-2), band assembly (122H18-0), vacuum kit set (1916T9-0), flat nozzle set (1916V7-8).

Items of standard equipment and specifications may vary by country or area.

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual.

A3-112025-1

#### MAKITA VIETNAM COMPANY LIMITED

MAKITA VIETNAM COMPANY LIMITED NORTH BRANCH  
Unit 5, No.1, Road 5, Vasp Industrial Park, Tu Son Ward,  
Bac Ninh Province  
Tel: 0222 376 5942

MAKITA VIETNAM COMPANY LIMITED - HANOI BRANCH  
Group 15 and No.4 Alley 83 Trung Chinh Street, Phuong Liet Ward,  
Hanoi City  
Tel: 0243 202 2585

MAKITA VIETNAM COMPANY LIMITED - DA NANG CITY BRANCH  
40 Chi Lang, Hai Chau Ward, Da Nang City  
Tel: 0236 3525 1178

MAKITA VIETNAM COMPANY LIMITED - CAN THO CITY BRANCH  
366 Vo Van Kiet Street, Area 5, Binh Thuy Ward, Can Tho City  
Tel: 0292 389 4358

UNIT 4-5-6, Block 16, 16L1-2, Street No 3, VSIP II, Binh Duong Ward, Ho Chi Minh City  
Tel: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

MAKITA VIETNAM COMPANY LIMITED - BUON MA THUOT CITY BRANCH  
68 Le Duc Tho, Buon Ma Thuot Ward, Dak Lak Province  
Tel: 0262 365 4559

MAKITA VIETNAM COMPANY LIMITED - HAI PHONG CITY BRANCH  
No 01, Lot 0H-01, Hoang Huy Riverside, Hong Bang Ward, Hai Phong City  
Tel: 0225 863 1529

MAKITA VIETNAM COMPANY LIMITED - NHA TRANG CITY BRANCH  
Lot 4-36-38, 38C Street, Vinh Diem Trung Urban Area, Tay Nha Trang Ward, Khanh Hoa Province  
Tel: 0258 320 0030

MAKITA VIETNAM COMPANY LIMITED - HO CHI MINH CITY BRANCH  
12 Trinh Van Can, Ben Thanh Ward, Ho Chi Minh City  
Tel: 0283 621 5191

## Air volume comparable to 28cc-class engine models



Vacuum  
Tool-less switching  
Blower

#### Blowing

Max air volume  
**13.8**  
m<sup>3</sup>/min

Max air velocity  
**68**m/s  
56 m/s (Average)

#### Vacuuming

Max air volume  
**13.0**  
m<sup>3</sup>/min

Max sealed suction  
**3.3** kPa


Tool-less switching between blower and vacuum





Delivers blower and vacuum air volume comparable to 28cc-class engine models, with tool-less switching between blower and vacuum modes


Insert. Rotate. Lock with one touch.

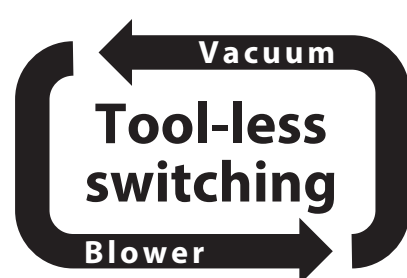

Before vacuuming

After vacuuming

Air volume is adjustable from gentle to strong.



High water-resistance compatible with XPT

eXtreme Protection Technology **XPT**

Continuous run time on a full battery charge

	With BL4080F battery	With BL4050F battery
Low mode	About 45 min	About 30 min
High mode	About 15 min	About 9 min

