

■ Also available

Attachments for UX01G Multi function power head

Various attachments are available for different applications.



Multi function power head
UX01G

Grass trimmer

EM403MP (199884-2)
EM408MP (191N34-9)
EM409MP (191N46-2)

EM408MP

Rotary Scissors

EM407MP (191M57-1)

EM407MP

Ground trimmer
Angle adjustment:

EN420MP (198061-3)
EN422MP (1912T2-0)

Angle adjustment

EN422MP

EN420MP

Ground trimmer
T-shaped:

EN424MP (1913D1-6)

T-shaped

EN425MP



EM408MP



EN421MP



EN424MP

■ Accessories

● Standard equipment

Shear blade 500 set

Part No. 1916X3-0 ●



Shear blade 330 set

Part No. 1912V6-6



■ Charging Time

	Fast Charging	
	DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
*1 BL4040 4.0Ah	45 min	67 min
*1 BL4050F 5.0Ah	50 min	85 min
*1 BL4080F/H 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Ground Trimmer

UG001GZ

Brake	Blade	Length: 521 mm Effective cutting width: 500 mm Tooth spacing: 28 mm (1-1/8")
Anti-restart function	No load speed	High / Low: 2,000 / 1,500 min ⁻¹
Electronic 2-Speed	Cutting strokes per minute	High / Low: 4,000 / 3,000 min ⁻¹
Constant Speed	Continuous use (Battery)	High / Low: 90 / 160 min. (BL4040F)
Soft start	Wheel diameter (Front / Rear)	180 / 300 mm (7-1/8" / 11-3/4")
	Wheel width (Front / Rear)	41 / 60 mm (1-5/8" / 2-3/8")
	Wheel Distance between wheel centers	Front: 258 mm (10-1/8")
	Cutting height adjustment	Range: 25 - 105 mm
	Vibration level	0.9 m/s ² (IEC62841-4-4)
	Uncertainty (K) for Vibration	1.5 m/s ² (IEC62841-4-4)
	Sound pressure level	73 dB(A) (EN12733)
	Sound power level	90 dB(A) (Guaranteed, EN12733), 88.4 dB(A) (Measured, EN12733)
	Dimensions (L x W x H)	1,345 x 521 x 791 mm (53 x 20-1/2 x 31-1/8")
	Net weight (Battery)	10 kg (22.1 lbs.) (BL4040F)
	UG001GZ: Battery & charger are sold separately.	
	Standard Equipment: Shear blade 500 set (1916X3-0), blade cover 500 (4133V1-5), cap 24 (422A15-7), cap 24 (424434-7), hex wrench 4 (783202-0)	

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area. A3-032026-1

MAKITA VIETNAM COMPANY LIMITED

UNIT 4-5-6, Block 16, 18L1-2, Street No 3, VSIP II, Binh Duong Ward, Ho Chi Minh City
Tel: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

MAKITA VIETNAM COMPANY LIMITED NORTH BRANCH
Unit 5, No.1, Road 8, Vsp Industrial Park, Tu Son Ward,
Bac Ninh Province
Tel: 0222 376 5942

MAKITA VIETNAM COMPANY LIMITED - DA NANG
CITY BRANCH
40 Chi Lang, Hai Chau Ward, Da Nang City
Tel: 0236 3525 179

MAKITA VIETNAM COMPANY LIMITED - BUON MA THUOT
CITY BRANCH
68 Le Duc Tho, Buon Ma Thuot Ward, Dak Lak Province
Tel: 0262 355 4556

MAKITA VIETNAM COMPANY LIMITED - NHA TRANG
CITY BRANCH
Lot 26-38, 86 Street, Vinh Diem Trung Urban Area, Tay Nha Trang Ward, Khanh Hoa Province
Tel: 0258 220 0093

MAKITA VIETNAM COMPANY LIMITED - HANOI BRANCH
Group 15 and No.4 Alley 63 Trung Chinh Street, Phung Liet Ward,
Hanoi City
Tel: 0243 202 2585

MAKITA VIETNAM COMPANY LIMITED - CAN THO
CITY BRANCH
366 Vo Van Kiet Street, Area 5, Binh Thuy Ward, Can Tho City
Tel: 0292 389 4358

MAKITA VIETNAM COMPANY LIMITED - HAI PHONG
CITY BRANCH
No 13, Lot TBC 13, The Lu Street, Hong Bang Ward, Hai Phong City
Tel: 0225 883 1529

MAKITA VIETNAM COMPANY LIMITED - HO CHI MINH
CITY BRANCH
12 Trinh Van Can, Ben Thanh Ward, Ho Chi Minh City
Tel: 0283 821 5191

Easy, effortless
grass cutting
with a simple push


Cutting width:
500 mm



Wide cutting width with
a self-standing three-wheel design
for fast, stable grass cutting.

Fast. Easy. Stable.

Ideal for wide-area grass cutting

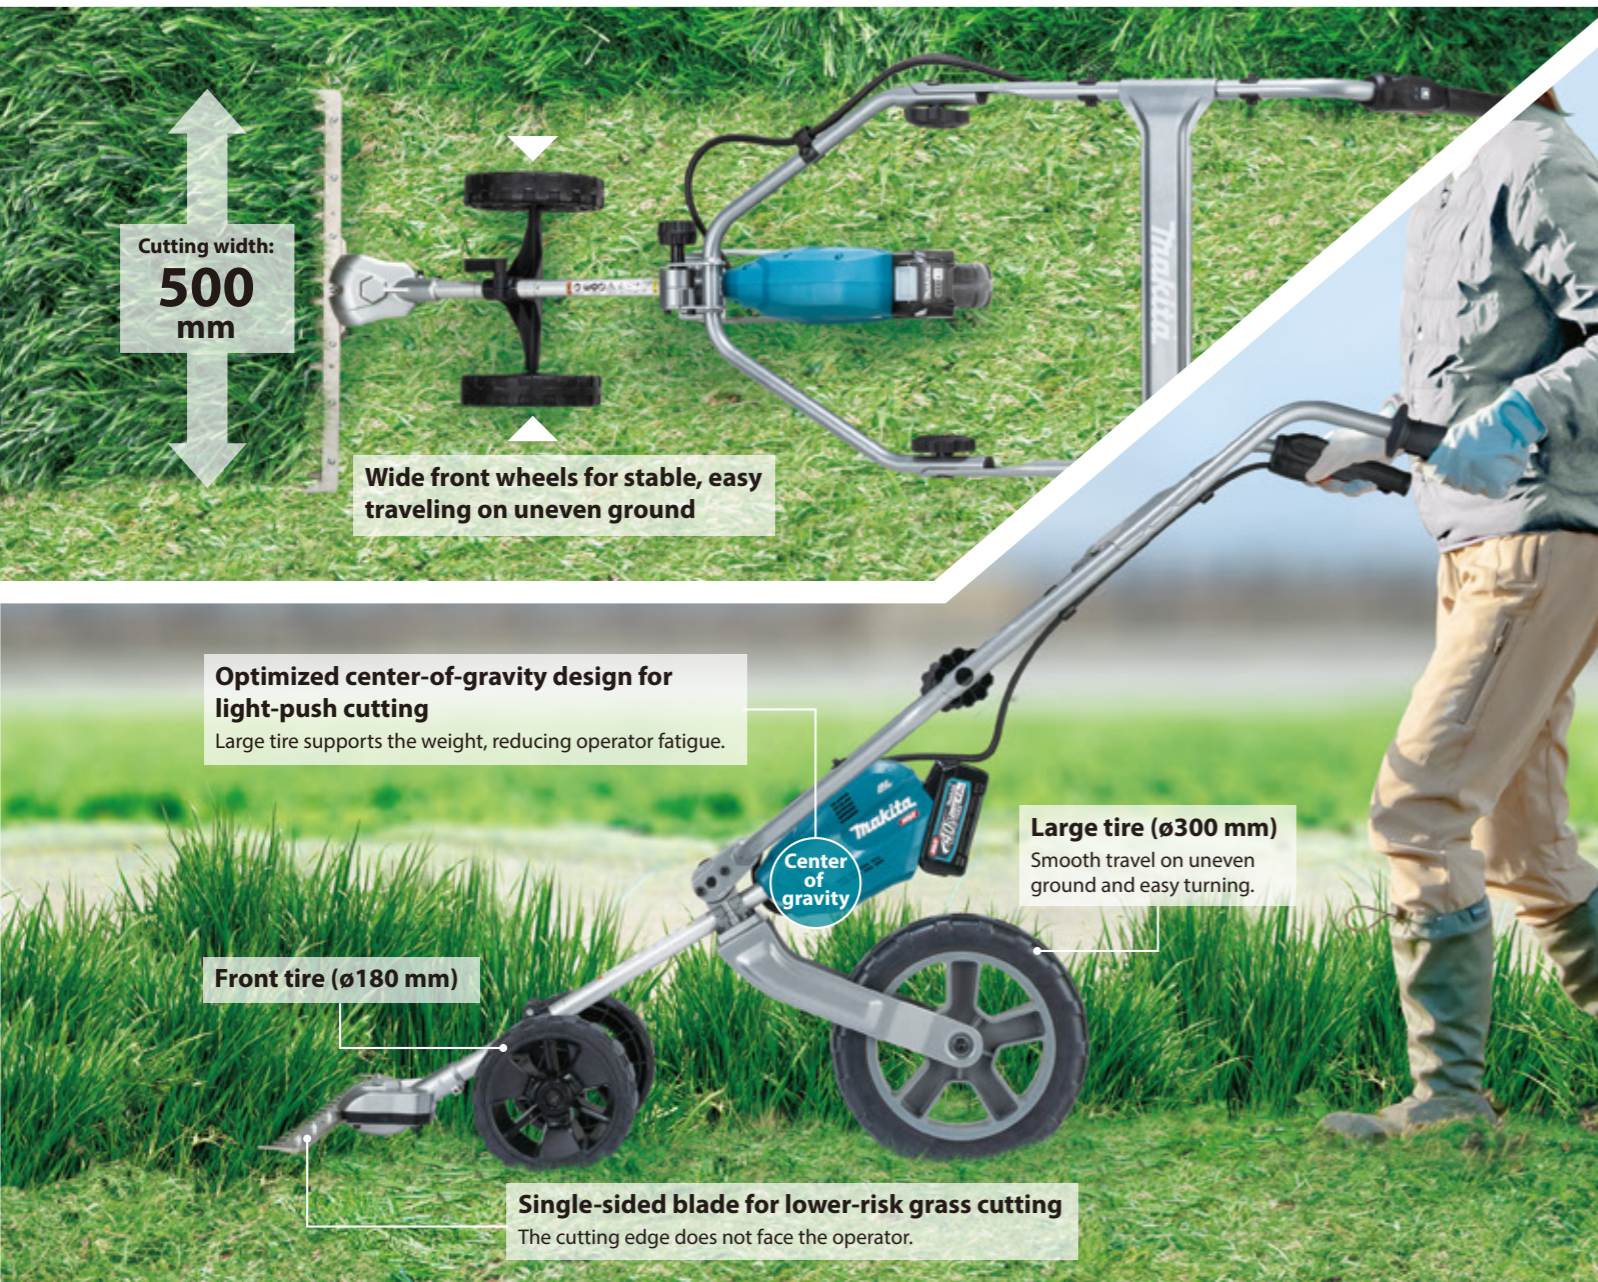

Cutting width:
500 mm

Wide front wheels for stable, easy traveling on uneven ground

Optimized center-of-gravity design for light-push cutting
Large tire supports the weight, reducing operator fatigue.


Large tire (ø300 mm)
Smooth travel on uneven ground and easy turning.

Front tire (ø180 mm)

Single-sided blade for lower-risk grass cutting
The cutting edge does not face the operator.

Tool-less handle height adjustment

3 positions to suit operator's height [790 mm / 910 mm / 1,020 mm]

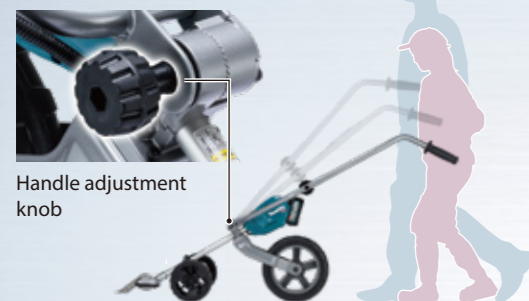

Handle adjustment knob

Tool-less cutting-height adjustment

supports higher height cutting, with stepless adjustment using the one-touch locking lever.

25 mm




Min. cutting height

105 mm



Max. cutting height

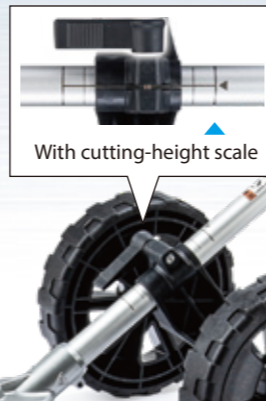

With cutting-height scale

No side-to-side swinging. Less fatigue. Efficient cutting.


Compact storage

Loosen the thumb nuts to fold the handle. Fits in compact cars.*
* May vary by vehicle.



Can be stored upright

Mode switch button provides tactile feedback for quick switching.

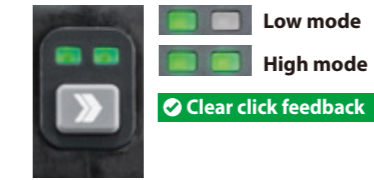


Low noise and vibration
+
Zero exhaust emissions

BL MOTOR High-power Brushless motor

XPT Water-resistance compatible with XPT

Approx. cutting area on a full battery charge

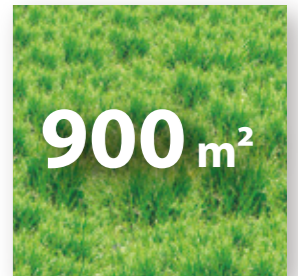

With BL4040 battery, high mode, grass height: approx. 300 - 400 mm
(Cutting area varies with grass type/density.)

Approx. continuous runtime on a full battery charge
(With BL4040 battery)

Low mode:
2 hr 40 min
High mode:
1 hr 30 min

Highly durable metal under-plate

Single-sided hedge-trimmer blades reduce stone scatter

Blades with curved tips	Sharp cutting
More acute edge angle and precise edge alignment	Three-facet ground blades
Upper blade	Highly rigid guide bar
Lower blade	Special coating
Image	resists sap buildup and rust.

Only the sharpened edges of the upper and lower blades make contact.

Recommended uses

Home:	Public:	Agricultural:	Maintenance:
garden weeds, lawns	sports fields, parks, vacant lots	field ridges and levees	roadsides, riverbanks