



Also available:
18V LXT Cordless Pruning Saws

DUC150
Guide bar length: 150mm




DUC101
Guide bar length: 100mm



Cordless Chain Saw
DUC258

Accessories ● **Standard Equipment:**

Drive sprocket / Guide bar / Saw chain / Guide bar cover / File diameter




Drive sprocket		Guide bar		Saw chain						File diameter			
Pitch/ No. of teeth	Part No.	Bar length	Type	Part No.	No. of drive links	Gauge	Pitch	Cutter type	Type OREGON	Saw chain Part No.	Bar cover Part No.	1st half of top plate	2nd half of top plate
.325" / 7	1916N6-4 ●	25cm/10"	Sprocket nose bar (Micro-Lite)	191T85-8 ●	46	1.1mm/.043"	.325"	MC	80TXL	191T89-0 ●	413X66-9 ●	4.0mm	4.0mm
3/8" / 6	1916N7-2	20cm/8"	Sprocket nose bar	191G13-5	33	1.1mm/.043"	3/8"	CC	90PX	191G99-9	413G28-5	4.5mm	4.0mm
		25cm/10"		191G14-3	40					191H00-0	413X66-9		

File and File holder

The file holder guides sharpening at 30° and controls depth to 4/5 of the file diameter.



Size	Saw chain type	File		File and File holder
		Q'ty	Part No.	Part No.
4.0mm	80TXL	2	D-67359	D-70948
		12	D-67365	
4.5mm	90PX	2	D-67371	D-70954
		12	D-67387	




Flat file and File handle



Flat file		File handle	
Q'ty	Part No.	Q'ty	Part No.
1	D-67452	1	D-67496
12	D-67468	12	D-67505

Depth gauge jointer

After sharpening the chain, check the height of the depth gauge using the chain gauge tool.

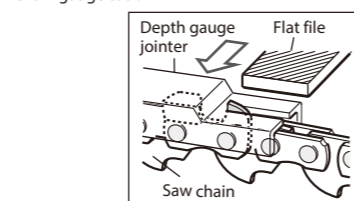

Round file bit

6.35mm (1/4) Hex shank (MZ)



Angle plate

25 / 30deg



Size	Round file bit	Angle plate	Angle plate & file bit set
	Part No.	Part No.	Part No.
4.0mm	D-73748	D-75605	D-75611
4.5mm	D-73754	D-75605	D-75627


File set in roll-up pouch

Round File(3pcs) / File Holder / Flat File / Handle(2pcs) / Depth Gauge set



Round file Size	Part No.
4.0mm	D-72154
4.5mm	D-72160

Filing vise



Part No.
D-67480

Chain oil

Capacity	Part No.
100ml	199897-3
1L	195093-1
	196946-7

Spike bumper set

Part No.
1917P5-6

Charging Time

	Fast Charging DC18RC	Standard Charging DC18SD
*BL1820B 2.0Ah	24 min	45 min
*BL1830B 3.0Ah	22 min	60 min
*BL1840B 4.0Ah	36 min	90 min
*BL1850B 5.0Ah	45 min	110 min
*BL1860B 6.0Ah	55 min	130 min

*1 Recommended battery
Items of standard equipment and specifications may vary by country or area.
The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual.

Cordless Chain Saw
DUC258Z

	Variable Speed	Chain type 80TXL / 90PX / 25AP
	Brake	Guide bar length 200, 250 mm (8, 10")
	Anti-restart function	Chain pitch 0.325 / 3/8 / 1/4"
	Constant Speed	Chain gauge 1.1 / 1.1 / 1.3 mm (0.043 / 0.043 / 0.05")
	Automatic Oiling	Chain speed (at no load) 0 - 24.0 m/s
	Chain Brake	Oil tank capacity 140 mL
		Vibration level 3.3 m/s ² (EN62841-1 and EN ISO 11681-2, Mode: Cutting wood)
		Sound pressure level 92 dB(A) (EN62841-1 and EN ISO 11681-2)
		Sound power level 100 dB(A) (EN62841-1 and EN ISO 11681-2)
		Dimensions (L x W x H) 287 x 181 x 194 mm (BL1860B)
		Net weight 3.0 kg (BL1860B, 250mm Guide bar, 80TXL Saw chain, Chain oil)
		DUC258Z: Battery & charger are sold separately.
		Standard Equipment: Sprocket 7 set (1916N6-4), guide bar 10 set (191T85-8), file holder set 4.0mm(5/32") (D-70948), guide bar case 280 (413X66-9), saw chain 10 set (191T89-0), box wrench 13 (782042-3).

Lightweight design with excellent maneuverability



Lightweight

at **3.0 kg**

With BL1860B, Guide bar 250mm Saw Chain: 80TXL

Performance comparable to

23cc-class chain saws

Compared to our engine model



MAKITA VIETNAM COMPANY LIMITED

UNT 4-6, Block 16, 18L12, Street No 3, VSP II, Binh Duong Ward, Ho Chi Minh City
Tel: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

MAKITA VIETNAM COMPANY LIMITED NORTH BRANCH
Unit 5, No.1, Road 6, Vsp Industrial Park, Tu Son Ward,
Bac Ninh Province,
Tel: 0222 376 5942

MAKITA VIETNAM COMPANY LIMITED - HANOI BRANCH
Group 15 and No.4 Alley 63 Truong Chinh Street, Phuong Liet Ward,
Hanoi City,
Tel: 0243 202 2585

MAKITA VIETNAM COMPANY LIMITED - DA NANG
CITY BRANCH
40 Chi Lang, Hai Chau Ward, Da Nang City
Tel: 0238 3525 179

MAKITA VIETNAM COMPANY LIMITED - CAN THO
CITY BRANCH
366 Vo Van Kiet Street, Area 5, Binh Thuy Ward, Can Tho City
Tel: 0292 389 4358

MAKITA VIETNAM COMPANY LIMITED - BUON MA THUOT
CITY BRANCH
69 Le Duc Tho, Buon Ma Thuot Ward, Dak Lak Province
Tel: 0262 355 4556

MAKITA VIETNAM COMPANY LIMITED - HAI PHONG
CITY BRANCH
No 01, Lot 0401, Hoang Hai Riverside, Hong Bang Ward, Hai Phong City
Tel: 0225 883 1529

MAKITA VIETNAM COMPANY LIMITED - NHA TRANG
CITY BRANCH
Lot 26-38, B6 Street, Vinh Diem Trung Urban Area, Tay Nha Trang Ward, Khanh Hoa Province
Tel: 0258 220 0039


MAKITA VIETNAM COMPANY LIMITED - HO CHI MINH
CITY BRANCH
12 Trinh Van Can, Ben Thanh Ward, Ho Chi Minh City
Tel: 0283 821 5191

AS-122025-1

Lightweight 23cc-class top-handle chain saw with excellent maneuverability

Excellent tool balance with optimal center of gravity

A shorter distance between the top handle and the center of gravity improves balance and reduces arm strain during horizontal cutting.

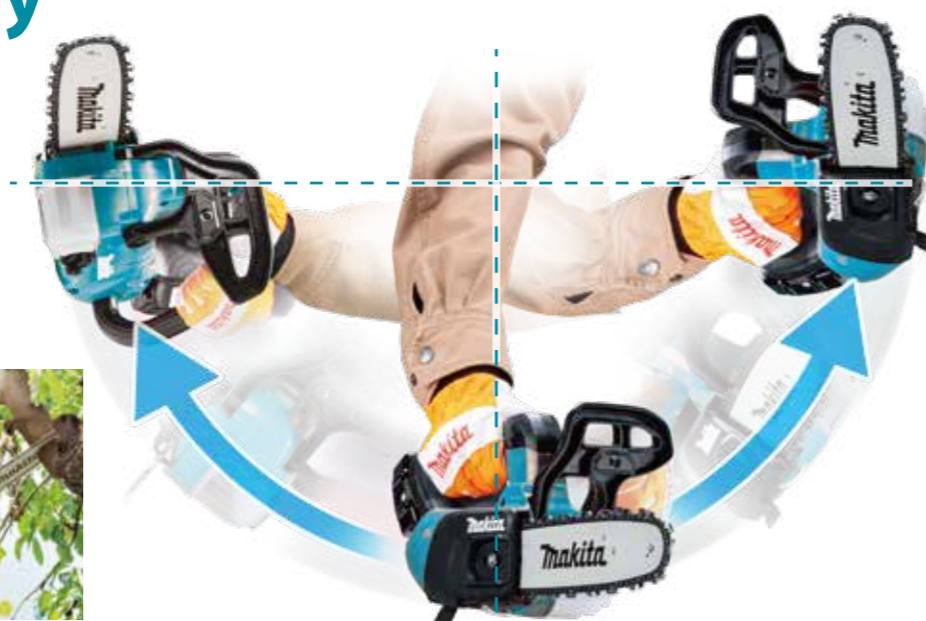

Comfortable handling with reduced wrist strain




Work amount on a full battery charge

Approx. **302 pcs**

With BL1860B, Saw Chain: 80TXL
Cutting 50 x 50 mm square cedar timber

A feeling of tenacity in use

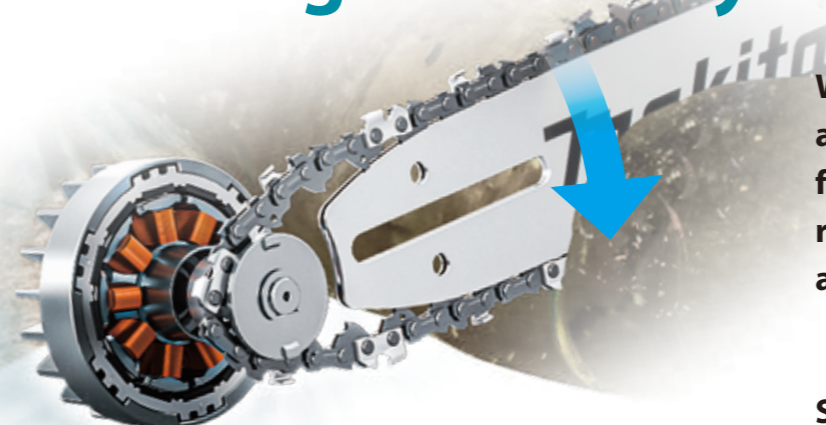

BL MOTOR Outer rotor High-power brushless motor

When the user presses the tool against the material with excessive force, they can feel a decrease in rotation speed, making it easy to adjust the load on the cutting edge.


Saw chain stall load increased by **50%**

*When cutting 100 x 100mm square cedar timber, compared to our 18V model

Excellent acceleration


Enhanced trigger response provides fast acceleration, enabling efficient continuous and repetitive cutting tasks such as pruning.

Chain speed **24.0 m/s**

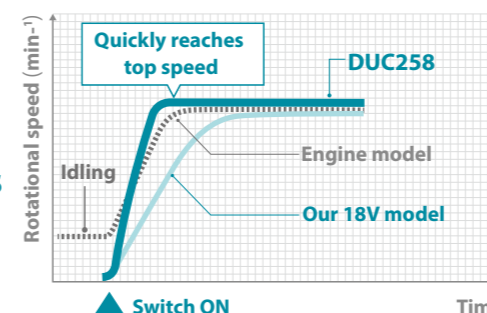


Excellent restartability (when locked)

If the tool locks due to load, removing the load immediately allows the motor to start again without retriggering, making it possible to resume cutting operations.

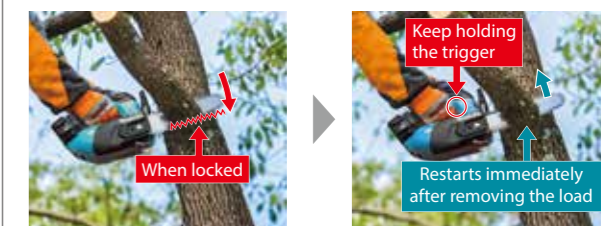


Main power button with enhanced operability

The button provides tactile feedback. The main power lamp and the two-color warning lamp clearly indicate power and error states.

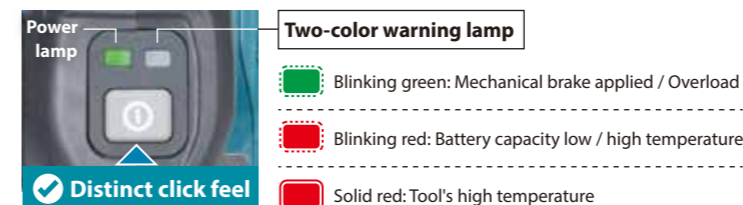

Hook with quick attachment/ detachment

Allows one-handed attachment to and removal from a carabiner or similar devices.

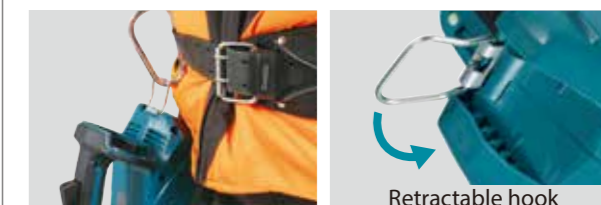

Other features

- **Captive nuts**
Prevents nut loss during guide bar or saw chain replacement.
- **Chain oil view window**
Allows the operator to easily check the oil level.
- **Variable speed trigger**
Allows for speed adjustments based on the material or application.
- **Automatic chain lubrication**
Adjustable automatic chain lubrication with 140 mL oil reservoir.



Water-resistance compatible with XPT