

■ Also available

Concrete Vibrator series

VR001G Tool only

without Flexible shaft
Flexible shafts from ø28 to ø38 are suitable for a wide range of jobsites



■ Accessories

Screed Blade

	Working width	Part No
Blade 900	900 mm	1917D5-2 / 1918L1-2
Blade 1400	1,400 mm	1917D4-4 / 1918L0-4
Blade 1800	1,800 mm	1917D3-6 / 1918K9-9



Battery case

	Compatible battery	Part No
Battery case L set	BL4050F / BL4080F / BL4080H	1910J1-0 / 1910J2-8
Battery case H set	Portable power pack PDC1200A02 / PDC1500A01	1910J4-4 / 1910J5-2



■ Charging Time

	Fast Charging	Standard Charging
	DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
*1 BL4050F 5.0Ah	50 min	85 min
*1 BL4080F/H 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Screed

VL001GZ


- Anti-restart function
- Constant Speed
- Toolless blade change

Working width	900 / 1,400 / 1,800 mm
Vibrations per minute (VPM)	11,000 min ⁻¹
Continuous use	150 min. (BL4040F) (Blade: 1,800 mm)
Vibration level	8.6 m/s ² (EN IEC62841-1)
Uncertainty (K) for Vibration	1.5 m/s ² (EN IEC62841-1)
Sound pressure level	85 dB(A) (EN IEC62841-1)
Sound power level	91 dB(A) (EN IEC62841-1)
Dimensions	1,562 x 935 / 1,435 / 1,836 x 258 mm (W: Blade, 900 / 1,400 / 1,800 mm)
Net weight	w/ BL4020, Blade 900: 5.0 kg w/ BL4080F, Blade 1800: 7.2 kg

VL001GZ: Battery & charger are sold separately.
Standard Equipment: Battery case (137467-0).

Excellent maneuverability
for efficient concrete finishing

Covers large work areas

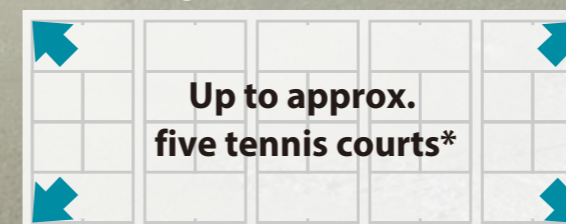

* When screeding at approx. 10 seconds per meter, with 1,400 mm blade and BL4040 battery

Runtime¹

With BL4040F, Blade1800

About 150 min

¹ On a full battery charge

Lightweight

at 6.2 kg

With BL4040F, Blade 1800



Three screed blade lengths for a wide range of job sites and applications

Screed Blades (Optional accessory)

	Working width
Blade 900	900 mm
Blade 1400	1,400 mm
Blade 1800	1,800 mm

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area. A4-072025-1

MAKITA VIETNAM COMPANY LIMITED

UNT 4-56, Block 16, 18L12, Street No 3, VSP II, Binh Duong Ward, Ho Chi Minh City
Tel: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

MAKITA VIETNAM COMPANY LIMITED NORTH BRANCH
Unit 5, No1, Road 6, Vsp Industrial Park, Tu Son Ward,
Bac Ninh Province,
Tel: 0222 376 5942

MAKITA VIETNAM COMPANY LIMITED - HANOI BRANCH
Group 15 and No.4 Alley 63 Truong Chinh Street, Phuong Liet Ward,
Hanoi City
Tel: 0243 202 2585

MAKITA VIETNAM COMPANY LIMITED - DA NANG
CITY BRANCH
40 Chi Lang, Hai Chau Ward, Da Nang City
Tel: 0238 3529 170

MAKITA VIETNAM COMPANY LIMITED - CAN THO
CITY BRANCH
366 Vo Van Kiet Street, Area 5, Binh Thuy Ward, Can Tho City
Tel: 0292 369 4556

MAKITA VIETNAM COMPANY LIMITED - BUON MA THUOT
CITY BRANCH
68 Le Duc Tho, Buon Ma Thuot Ward, Dak Lak Province
Tel: 0262 305 4536

MAKITA VIETNAM COMPANY LIMITED - HAI PHONG
CITY BRANCH
No 13, Lot TBC 13, The Lu Street, Hong Bang Ward, Hai Phong City
Tel: 0225 883 1529

MAKITA VIETNAM COMPANY LIMITED - NHA TRANG
CITY BRANCH
Lot 26-38, 96 Street, Vinh Diem Trung Urban Area, Tay Nha Trang, Khanh Hoa Province
Tel: 0258 220 0038

MAKITA VIETNAM COMPANY LIMITED - HO CHI MINH
CITY BRANCH
12 Trinh Van Can, Ben Thanh Ward, Ho Chi Minh City
Tel: 0283 821 5191



Lightweight. Stable. Efficient.


Lightweight design and stable vibration for smooth finishing and tamping.



Powerful, stable vibration
Vibrations per minute:
11,000 VPM

High-power brushless motor
BL MOTOR

Constant speed control
maintains stable vibration at low battery levels

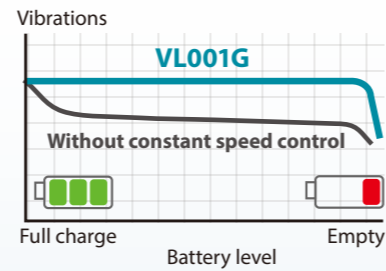

Tool-less installation and removal
Simply insert the shaft tip into the blade, then turn the lock lever.



Three blade options to suit different site sizes and applications, from exterior concrete work to residential foundations. (Optional accessory)



Large work area



Small work area




Working width
1,800 mm

Working width
1,400 mm

Working width
900 mm



Concrete placement process (example)

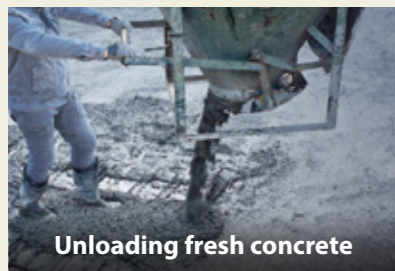


Unloading fresh concrete



Spreading the concrete



Compacting with a vibrator

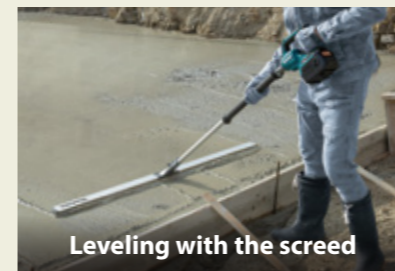

Leveling with the screed



Surface finishing



Completed after curing

Reduces uneven concrete strength and cracking


The vibrating blade settles the aggregate and brings cement paste evenly to the surface, helping minimize variations in strength and reduce cracking.

Brings cement paste evenly to the surface

Settles the aggregate

After leveling


Before leveling

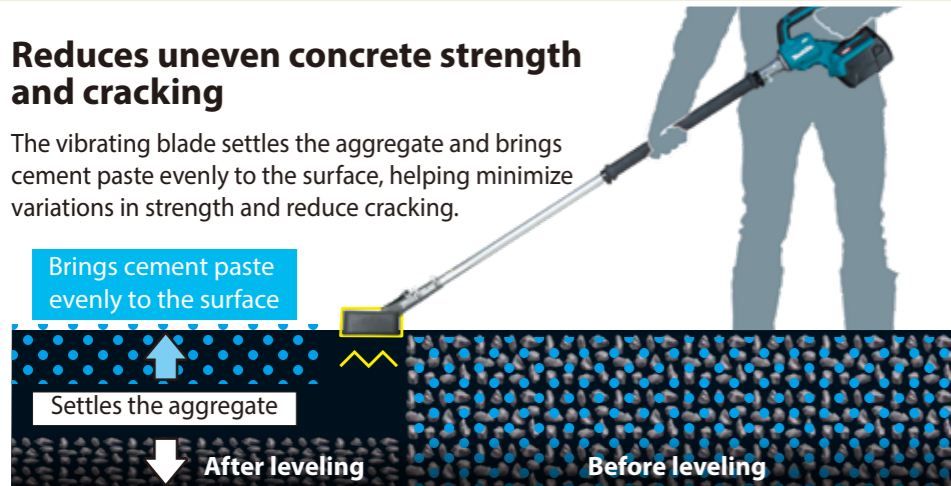

The blade is washable.



Protection against concrete intrusion

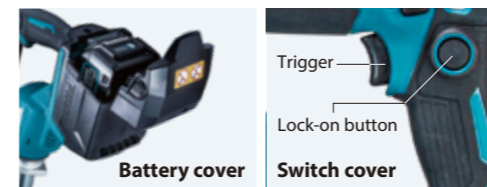

Low battery indicator



Compact loading

The tool body and blade can be easily attached and removed without tools for space-saving loading and transport.



Water-resistance compatible with XPT



(eXtreme Protection Technology)

