


■ Accessories ● Standard Equipment

Max. cutting diameter

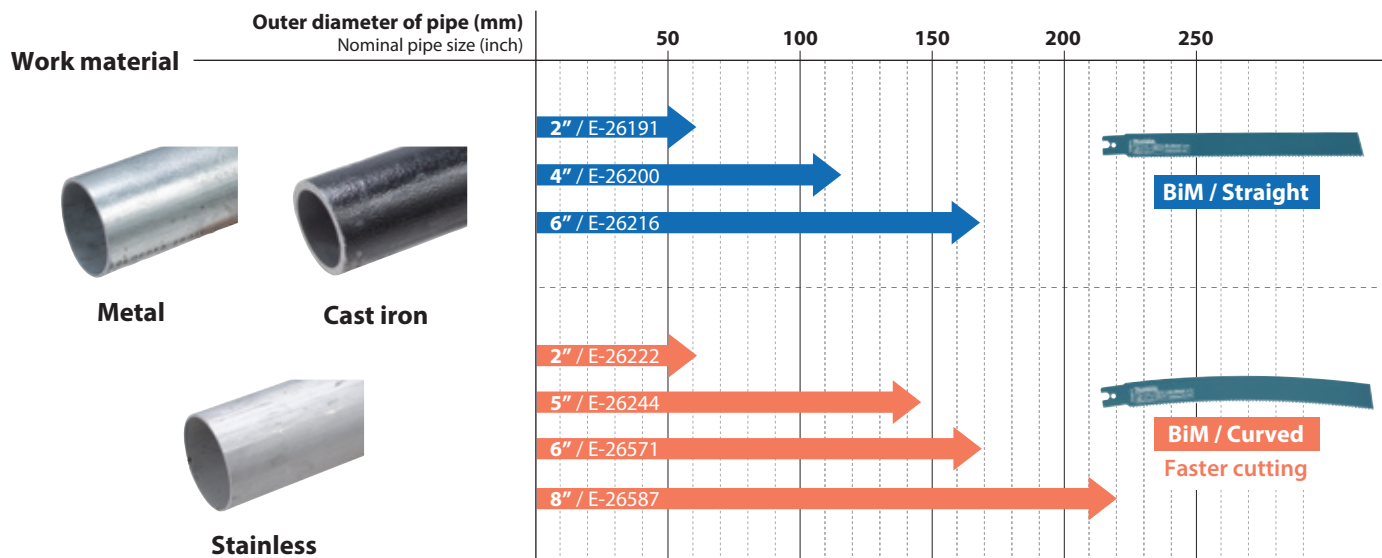

Chain vise reciprocating saw blade, cast iron pipes

Work material	Type of cut	Tooth type	Max cutting diameter mm	Nominal pipe size	TPI	Overall length mm	Working length mm	Thickness mm	Item material	Note	Sales pkg q'ty	Part No.
Metal, Cast iron, Stainless	Heavy	Milled and side set teeth	61	2"	8	145	117	1.6	Bi-Metal	For chain vise reciprocating saw	5	E-26191 ●
			118	4"		200	172				5	E-26200 ●
			169	6"		260	232				5	E-26216 ●

Chain vise reciprocating saw blade, cast iron pipes curved shape

Work material	Type of cut	Tooth type	Max cutting diameter mm	Nominal pipe size	TPI	Overall length mm	Working length mm	Thickness mm	Item material	Note	Sales pkg q'ty	Part No.
Metal, Cast iron, Stainless	Heavy	Milled and side set teeth	61	2"	8	145	117	1.6	Bi-Metal	For chain vise reciprocating saw	5	E-26222
			145	5"		260	232				5	E-26244
			169	6"		300	272				5	E-26571
			220	8"		350	322				5	E-26587

Blade clamp S set

A part for fixing thin reciprocating saw blades

Part No. 1916C6-7



■ Charging Time

		Fast Charging DC40RA	Standard Charging DC40RC
*1 BL4020 2.0Ah		22 min	30 min
*1 BL4025 2.5Ah		28 min	38 min
*1 BL4040/F 4.0Ah		45 min	67 min
*1 BL4050F 5.0Ah		50 min	85 min
BL4080F/H 8.0Ah		76 min	170 min

*1 Recommended battery

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area. A3-102025-1

Cordless Recipro Saw JR003G

Variable Speed	Max cutting diameter	ø220 mm (8-5/8")
Brake	Stroke length	26 mm (1")
Anti-restart function	Strokes per minute	0 - 2,200 min ⁻¹
Constant Speed	Speed adjustment	800 - 2,200
Soft Start	Vibration level	14.9 m/s ² (EN62841-2-11, Mode: Cutting boards), 15.3 m/s ² (EN62841-2-11, Mode: Cutting wooden beams)
Carrying Case	Uncertainty (K) for Vibration	1.6 m/s ² (EN62841-2-11, Mode: Cutting boards), 1.8 m/s ² (EN62841-2-11, Mode: Cutting wooden beams)
	Sound pressure level	82 dB (A) (EN62841-2-11)
	Sound power level	90 dB (A) (EN62841-2-11)
	Uncertainty (K) for Noise	3 dB (EN62841-2-11)
	Dimensions (L x W x H)	583 x 103 x 152 mm (BL4040)
	Net weight	4.5 kg (BL4020) - 6.8 kg (BL4080F)

JR003GZ: Battery & charger are sold separately.

Standard Equipment:
Saw chain, saw blade (E-26191) (E-26216), vise assembly (122J60-3), front grip (273042-9), grip sharp (327F91-5), hex. wrench 4 (783202-0)

Satisfy Professional's Needs

Easy and secure fixing
with chain vise



Capable of cutting large-diameter pipes



MAKITA VIETNAM COMPANY LIMITED

Unit 4-5-6, Block 16, 18L12, Street No 3, VSIP II, Binh Duong Ward, Ho Chi Minh City
Tel: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

MAKITA VIETNAM COMPANY LIMITED NORTH BRANCH
Unit 5, No.1, Road 6, Vsp Industrial Park, Tu Son Ward,
Bac Ninh Province
Tel: 0222 376 5942

MAKITA VIETNAM COMPANY LIMITED - HANOI BRANCH
Group 15 and No.4 Alley 63 Truong Chinh Street, Phuong Liet Ward,
Hanoi City
Tel: 0243 202 2585

MAKITA VIETNAM COMPANY LIMITED - DA NANG
CITY BRANCH
40 Chi Long, Hai Chau Ward, Da Nang City
Tel: 0236 3629 170

MAKITA VIETNAM COMPANY LIMITED - CAN THO
CITY BRANCH
366 Vo Van Kiet Street, Area 5, Binh Thuy Ward, Can Tho City
Tel: 0292 369 4356

MAKITA VIETNAM COMPANY LIMITED - BUON MA THUOT
CITY BRANCH
68 Le Duc Tho, Buon Ma Thuot Ward, Dak Lak Province
Tel: 0262 305 4536

MAKITA VIETNAM COMPANY LIMITED - HAI PHONG
CITY BRANCH
No 01, Lot OH01, Hoang Hai Riverside, Hong Bang Ward, Hai Phong City
Tel: 0225 863 1529

MAKITA VIETNAM COMPANY LIMITED - NHA TRANG
CITY BRANCH
Lot 26-38, 86 Street, Vinh Diem Trung Urban Area, Tay Nha Trang Ward, Khanh Hoa Province
Tel: 0258 220 0036

MAKITA VIETNAM COMPANY LIMITED - HO CHI MINH
CITY BRANCH
12 Trinh Van Can, Ben Thanh Ward, Ho Chi Minh City
Tel: 0283 621 5191

Highly durable construction for heavy-duty tasks



BL
MOTOR



Constant speed control
Maintains motor speed during heavy-duty cutting

Cutting speed*
(approx)


28 sec.

Work amount*
(approx)

21 pcs.

With BL4040 battery

*Cutting a steel pipe with an outer diameter of 114 mm

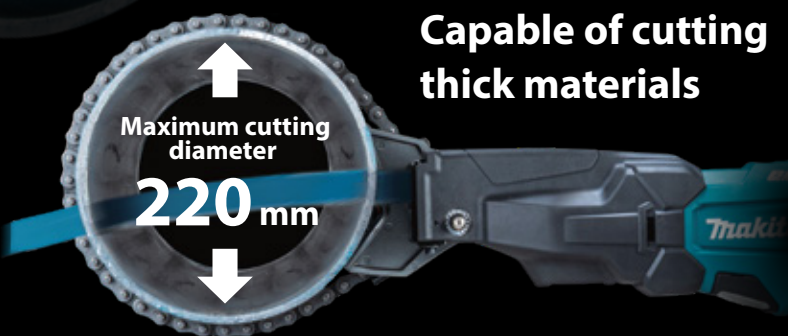

Capable of cutting thick materials

Usable without the chain vise

The tool can be used as a standard reciprocating saw without the chain vise by attaching the front grip supplied as a standard accessory.



Blade clamp S set
(Optional accessory)
For installing a thin reciprocating saw blade



Front grip
(Standard accessory)



Quick and easy fixing

The spring built into the vise allows quick and secure fixing.



Temporary holding

The spring built into the vise allows the chain to be temporarily held in place while wrapped around the pipe.




Efficiently cuts various materials



Cutting cast iron pipes

Easy blade clamp maintenance

The blade clamp, which requires frequent replacement under heavy-duty conditions, can be easily replaced simply by loosening the hex socket bolts without removing the shoe.

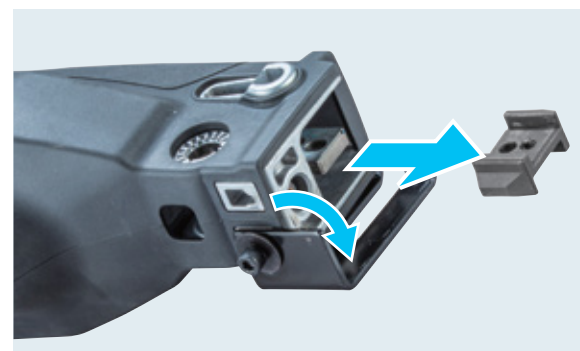

Adjustable stroke rate based on material



Material	Number on dial	Strokes per minute
Cast iron pipes	5	0 - 2,200
	4	0 - 1,850
Iron pipes	3	0 - 1,500
	2	0 - 1,150
Stainless steel pipes	1	0 - 800



High water-resistance

XPT

Speed adjusting dial

