



125mm Cordless Cutter series

Cuts up to 40 mm with 125 mm wheel



Cordless  
Dustless Cutter

**DCC500** 125 mm (5")  
Dry cutting



Cordless Cutter

**DCC501** 125 mm (5")

Wet cutting



Rotation  
speed **8,800min<sup>-1</sup>**

**BL** MOTOR **AWS** **ADT** **XPT**

# BL motor provides high power and excellent cutting performance



## Cordless Dustless Cutter DCC500



360° rotatable dust collecting port

Water supply attachment with a tank capacity of 500mL

## Cordless Cutter DCC501



Powered by 18V LXT Li-Ion battery



Single LED job light with afterglow function.



Bevel cut up to 45 degrees enables bevel cutting of bricks.



Auto-start Wireless System



Automatic speed control



eXtreme Protection Technology



**Work amount** Battery: BL1850B on a single full charge

Cut 600mm groove in bricks at the depth of 10mm

**DCC500:** about **16m** (Dry type 125mm Diamond wheel)

Cut off ceramic tiles with 600mm length and 9.5mm thickness

**DCC501:** about **25m** (Wet type 105mm Diamond wheel)

### Accessories

**Dust bag assembly**  
Part No. 126738-0



**Dust cover set**  
Part No. 191N83-6



**Water supply cover set A**  
Part No. 191M48-2




**Water supply hose complete A**  
Part No. 140Y23-7



**Base cover set**  
Part No. 196943-3



**Guide rail adapter set**  
Part No. 198673-2




**Guide rail**

length	Part No.
1.0m	199140-0
1.4m	194368-5
1.5m	199141-8
1.9m	194925-9
3.0m	194367-7

**Clamp set**

Type	Part No.
Standard	194385-5
Quick	199826-6

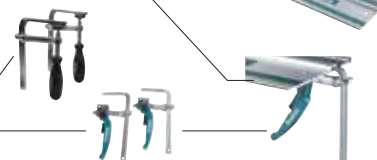

Cordless Dustless Cutter	DCC500 125 mm (5")
Cordless Cutter	DCC501 125 mm (5")

Brake	125 mm (5")
Soft Start	20 mm (13/16")
Bevel Cutting 45 left	90°: 40.0 mm (1-9/16")
Dust Collection	45°: 27 mm
Built-in Job Light	No Load Speed (RPM) 8,800
Carrying Case	Vibration Level Concrete Cutting: 4.0 m/s <sup>2</sup>
	Sound Pressure Level 96 dB(A)
	Sound Power Level 107 dB(A)
	Dimensions (L x W x H) BL1830B / BL1840B / BL1850B / BL1860B: 283 x 158 x 172 mm
	DCC500: 283 x 163 x 172 mm
	(11-1/8 x 6-1/4 x 6-3/4")
	DCC501: 283 x 163 x 172 mm
	(11-1/8 x 6-3/8 x 6-3/4")
	<b>Net weight</b> DCC500: 2.6 - 3.1 kg (5.7 - 6.8 lbs.)
	DCC501: 2.7 - 3.1 kg (6.0 - 6.8 lbs.)

#### Standard Equipment:

DCC500: Diamond Wheel, Dust Bag, Hex Wrench  
DCC501: Diamond Wheel, Water Supply Tank Assembly, Dust Bag, Hex Wrench

The weight may differ depending on the attachment(s), including the battery cartridge.  
The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.  
Items of standard equipment and specifications may vary by country or area.

## Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202101