


Accessories

Band saw blade

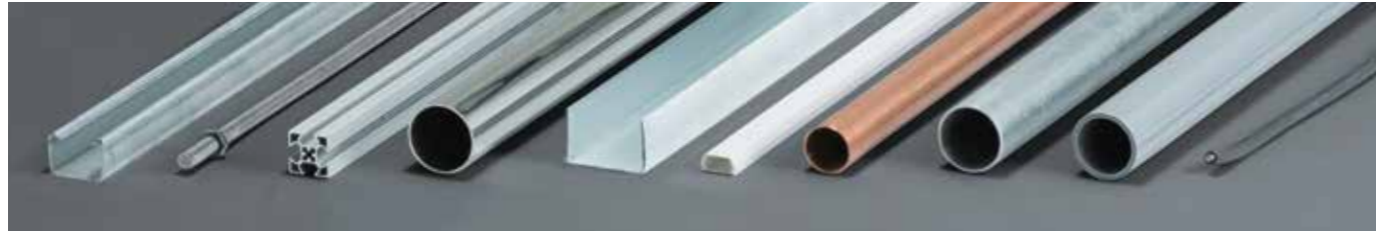

DPB183

Width : 13 mm, Thickness : 0.5 mm, Length : 835 mm

Part No.	Type	Width (mm)	No. of teeth per inch	Teeth shape	Application
B-40543	Bi-Metal (5pc.)	3mm-6 mm	14		Plastics and non-ferrous metal. Mild steel, cast steel and cast iron. Hard steel and stainless steel.
B-40559		2 mm- 3 mm	18		
B-40565		less than 2mm	24		

DPB184

Width : 13 mm, Thickness : 0.5 mm, Length : 730 mm

Part No.	Type	Width (mm)	No. of teeth per inch	Teeth shape	Application
E-04101	Bi-Metal (5pc.)	3mm-6 mm	14		Plastics and non-ferrous metal. Mild steel, cast steel and cast iron. Hard steel and stainless steel.
E-04117		2 mm- 3 mm	18		
E-04123		less than 2mm	24		

Hook assembly set Grip 36 Complete

Part No. 191G64-8

Part No. 158237-4
DPB183 only



Cordless Portable Band Saw Line-up

DPB182

Capacity Round: 64 mm (2-1/2")
Rectangular: 64x64 mm (2-1/2"x2-1/2")
Blade Speed 3.2 m/s (630 ft/min.)
Blade Size Length: 835 mm (32-7/8")
Width: 13 mm (1/2")
Thickness: 0.5 mm (0.02")
Cutting Metal: 2.5 m/s² or less
Vibration Level 79 dB(A)
Sound Pressure Level 477x197x229 mm (18-3/4"x7-3/4"x9")
Dimensions (L x W x H)
Net weight 3.8 - 4.1 kg (8.3 - 9.0 lbs.)



Cordless Portable Band Saw

DPB183RTE / DPB183Z / DPB184RTE / DPB184Z

	DPB183	DPB184
Variable Speed	Round: 66 mm (2-5/8") Square: 66 x 66 mm (2-5/8" x 2-5/8")	Round: 51 mm (2") Square: 51 x 51 mm (2" x 2")
Brake		
Constant Speed	Blade Speed 0 - 3.2 m/s (0 - 630 ft/min.) Blade Size Length: 835 mm (32-7/8") Width: 13 mm (1/2") Thickness: 0.5 mm (0.02") Cutting Metal: 2.5 m/s ² or less	0 - 3.2 m/s (0 - 630 ft/min.) Length: 730 mm (28-3/4") Width: 13 mm (1/2") Thickness: 0.5 mm (0.02") Cutting Metal: 2.5 m/s ² or less
Built-in Job Light		
Carrying Case		
Vibration Level	80 dB(A)	80 dB(A)
Sound Pressure Level	w/ BL1830B / BL1840B / BL1850B / BL1860B: 392x174x242 mm	w/ BL1830B / BL1840B / BL1850B / BL1860B: 373x162x223 mm
Dimensions (L x W x H)		
Net weight	3.6 - 3.9 kg (7.9 - 8.6 lbs.) DPB183RTE: 2 battery 5.0Ah (BL1850B), fast charger (DC18RC)	3.3 - 3.6 kg (7.3 - 7.9 lbs.) DPB184RTE: 2 battery 5.0Ah (BL1850B), fast charger (DC18RC)
	DPB183Z: Battery & charger not include	DPB184Z: Battery & charger not include

Standard Equipment: Hook, hex wrench 4 (783202-0), portable bandsaw blade (B-40559 use for DPB183) (E-04117 use for DPB184), tool bag (831303-9 standard equipment of specific battery RTE only).

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

M4-052023-1

Satisfy Professional's Needs



Cordless Portable Band Saw
DPB183 / DPB184



High power & Compact design

DPB184 Max Cutting Capacity **51 mm**



DPB183 Max Cutting Capacity **66 mm**

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 5/5, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, P. Phú Châu, TP. Từ Sơn, T. Bắc Ninh, BT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HÀ NỘI
85 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội, BT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH ĐÀ NẴNG
102 Triều Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng, BT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH CẦN THƠ
366 Võ Văn Kiệt, Khu Vực 5, P. An Thủy, Q. Bình Thủy, TP. Cần Thơ, BT: 0292 389 4358 Fax: 0292 389 4359

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HẢI PHÒNG
Số 01 La Khê, D. An Hoàng Hwy Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng, BT: 0225 883 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HỒ CHÍ MINH
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh, BT: 0283 821 5191



Easy installation / removal of blade

Redesigned structure of wheel cover* and frame (lowered aluminum portion than wheel) for easy installation / removal of blade when the wheel cover is open.

* This model comes with wheel cover for all specifications.




BL MOTOR Brushless motor




× Constant speed control

minimizes the reduction in blade speed to provide stable cutting.

■ Work speed

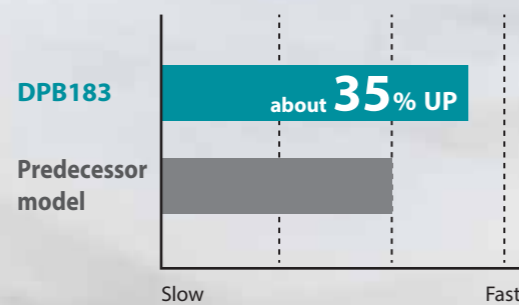


■ Image

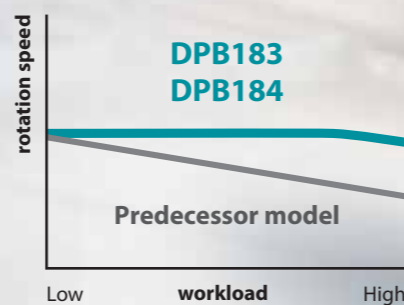

Test material: Carbon steel pipe of 48.6mm diameter with thickness of 3.7mm



Compact design

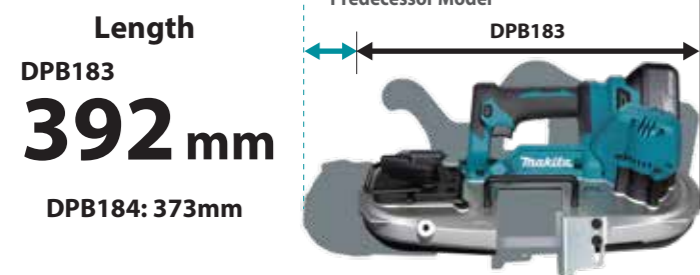

Drastically reduced size has been achieved by relocating the handle for easier operation even in tight spaces.



Easy blade track adjustment simply by turning the screw



Variable speed control by dial (DPB183 only)

An optimum cutting speed can be selected to suit application.



Catch bracket

protects the tool body from damage by hitting against workpiece.

Stable cutting with highly rigid aluminum structure



- Rigid aluminum die-cast frame and gear housing prevents the blade from sliding off the wheel.
- The rigidity also allows for increasing the tension on the blade to prevent the blade from slipping on the wheel.

DPB183

High power type

Max cutting capacity

66 mm

Net weight

3.9 kg

battery: BL1850B

DPB184

Compact type

Max cutting capacity

51 mm

Net weight

3.6 kg

battery: BL1850B

