



Cordless Hedge Trimmer

DUH604S 600 mm (23-5/8")
DUH754S 750 mm (29-1/2")

Satisfy Professional's Needs



18V
LITHIUM-ION

Light weight

3.9kg

with BL1850B (5.0Ah) battery

High speed

strokes per minute

4,400min⁻¹

High speed mode
(No load speed)

Continuous Use

High / Med / Low

58 / 75 / 167 min

with BL1850B (5.0Ah) battery
model: DUH604S






Same cutting performance as Engine models

DUH604S

Blade Length:
600 mm (23-5/8")

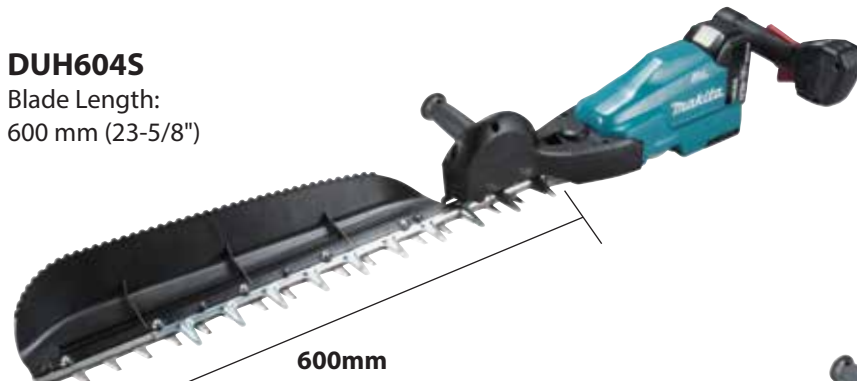

3-speed

- High : 4,400 SPM
- Medium : 3,600 SPM
- Low : 2,000 SPM

600mm

DUH754S

Blade Length:
750 mm (29-1/2")

750mm

750mm

Chip receiver




Optimum blade shape for smooth cutting




Sharp edge blades:

Upper blade...curving downward
Lower blade...curving upward




Contact point is only both tips.

Twigs are caught easily and held firmly

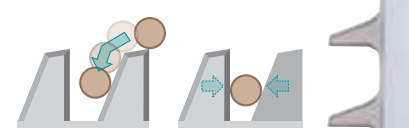

Reverse rotation system

for freeing the blade when it is jammed by thick branches.

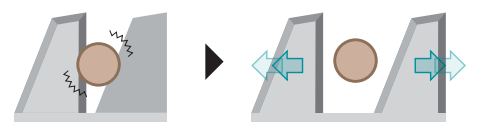

Accessories

Shear blade

191D38-1



191D39-9



Part No.	Model	Size
191D38-1	DUH604S	600 mm
191D39-9	DUH754S	750 mm

Chip receiver assembly set

Part No. 191D33-1
Model: DUH604S

Part No. 191D34-9
Model: DUH754S



Cordless Hedge Trimmer

DUH604S 600 mm (23-5/8") **DUH754S** 750 mm (29-1/2")

	DUH604S	DUH754S
Brake		
Reversing		
Electronic 3-Speed		
Constant Speed		
Soft Start		
Anti Vibration		
Blade Length	600 mm (23-5/8")	750 mm (29-1/2")
Tooth Spacing	35 mm (1-3/8")	35 mm (1-3/8")
Max Cutting Capacity	23.5 mm (15/16")	23.5 mm (15/16")
Strokes Per Minute (SPM)	High / Med / Low: 4,400 / 3,600 / 2,000	High / Med / Low: 4,400 / 3,600 / 2,000
Continuous Use (min.)	w/ BL1860B High / Med / Low: 70 / 90 / 200	w/ BL1860B High / Med / Low: 65 / 80 / 190
Sound Pressure Level	79.3 dB(A)	80.6 dB(A)
Sound Power Level	90.3 dB(A)	91.6 dB(A)
Vibration Level	2.5 m/s ² or less	2.5 m/s ² or less
Dimensions (L x W x H)	1,061x282x143 mm (41-3/4"x11-1/8"x5-5/8")	1,200x282x143 mm (47-1/4"x11-1/8"x5-5/8")
Net weight	3.4 - 3.9 kg (7.5 - 8.6 lbs.)	3.4 - 3.9 kg (7.5 - 8.6 lbs.)

Standard Equipment : Blade Cover, Safety Goggles (country-specific), Chip Receiver (country-specific), Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge.

The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202002