

Makita Laser Series

Line-Point Laser
SK103PZ




Cross Line Laser
SK104Z



Laser Level
SKR200Z



Cross Line Laser
SK106D / SK105D

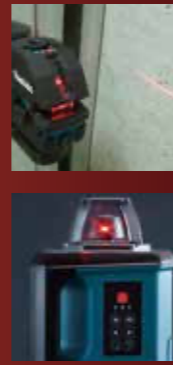

Rechargeable Green Laser Series



SK40GD / SK20GD / SK10GD
SK312GD / SK209GD / SK106GD / SK105GD

Bright green laser for increased visibility

Accessories

Laser Receiver
LDG-5

Part No.
TK0LDG501F
SK40GD / SK20GD /
SK10GD



Laser Receiver
LDG-3

Part No.
TK0LDG301F
SK312GD / SK209GD



Laser Receiver
LDX1

Part No.
LE00855702
SK106GD / SK105GD
SK106D / SK105D



Large soft bag

Part No. 832173-9
SK106GD / SK105GD
SK106D / SK105D

SK106GD
BL1021B x2
DC105B
Wall Mount
Adapter



AA Battery Pack

ADP09
loaded with eight AA batteries



Adapter for USB

ADP05
For LXT batteries



Power supply cable

Part No. 199006-4
SK312GD / SK209GD
Part No. 199178-5
SK106GD / SK105GD



Min tripod

Part No.
TK0LM1001F



Tripod 1800

Part No.
TK0LM4001F



Tripod 2900

Part No.
TK0LM5030F



*ADP09 is not available for USA market.

Hand strap set

Part No. 199007-2



Wall mount

Part No. TK000ET03F
SK40GD / SK20GD / SK10GD /
SK312GD / SK209GD



Part No. LE00855706
SK106GD / SK105GD



Charging Time

	Fast Charging	
	DC105B	DC10WD
BL1016 1.5Ah	22 min	50 min
BL1021B 2.0Ah	30 min	70 min
BL1041B 4.0Ah	60 min	130 min

Rechargeable Green Multi Line Laser

SK40GDZ / SK20GDZ / SK10GDZ / SK312GDZ / SK209GDZ

	SK40GD / SK20GD / SK10GD	SK312GD / SK209GD
Leveling accuracy	±1 mm / 10 m	±1 mm / 10 m
Self-leveling range	±4°	±2°
Laser fan angle	Horizontal: 110° Vertical: 130°	Horizontal: 110° Vertical: 130°
Laser line selection	4V1H / 2V1H / 1V1H	3V1H / 2V1H
Laser type	Laser class 2: 515 nm	Laser class 2: 515 nm
Operating Temperature	-10 - 40 °C	-10 - 40 °C
Tripod thread	-	5/8"
Protection class*1	IP54	IP54
Operating Time (Approx. Hours)	BL1016 SK40GD: 6 SK20GD: 9 SK10GD: 12	BL1016 / BL1021B / BL1041B SK312GD: 10 / 14 / 28 SK209GD: 15 / 20 / 40
Dimensions (Ø x H)*1	Ø98x223 mm	Ø87x230 mm
Net weight	1.4 - 1.6 kg (3.1 - 3.5 lbs)	1.5 - 1.6 kg (3.3 - 3.5 lbs)

*1 for body

Standard Equipment : Laser Viewing Glass, Storage Case

SK40GDZ / SK20GDZ / SK10GDZ / SK312GDZ / SK209GDZ: Battery & charger are sold separately

Dimensions (with carry handle in retracted position)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Rechargeable Green Cross Line Laser

SK106GDZ 4-point / SK105GDZ

	SK106GD / SK105GD
Leveling accuracy	±3 mm / 10 m
Self-leveling range	±4°
Laser fan angle	SK106GD: Horizontal: 180° / Vertical: 170° SK105GD: Horizontal: 180° / Vertical: 160°
Laser line selection	1V1H
Laser type	Laser class 2: 525 nm
Operating temperature	-10 - 50 °C
Tripod thread	1/4" / 5/8"
Protection class*1	IP54
Operating Time (Approx. Hours)	BL1016 / BL1021B / BL1041B 7 / 10 / 20 w/ BL1016/BL1021B: 138x64x102 mm (5-7/16"x2-1/2"x4") SK106GD: 0.69 - 0.85 kg (1.5 - 1.9 lbs.) SK105GD: 0.67 - 0.84 kg (1.5 - 1.9 lbs.)
Dimensions (L x W x H)	
Net weight	

*1 for body

Standard Equipment : Laser Viewing Glass, Storage Case


SK106GDZ / SK105GDZ: Battery & charger are sold separately



Horizontal / 4-Vertical lines
Horizontal / 2-Vertical lines
Cross line + Point



Horizontal / 3-Vertical lines
Horizontal / 2-Vertical lines
Cross line + Point
Cross line

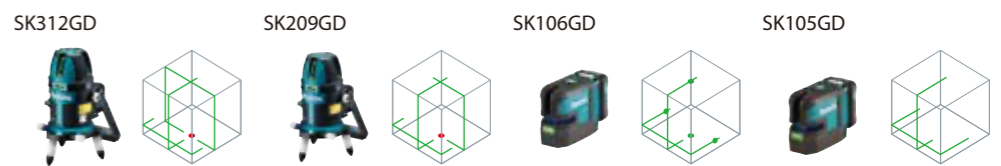

SK40GD / SK20GD / SK10GD / SK312GD / SK209GD	SK106GD / SK105GD
Leveling accuracy ±1 mm / 10m	Leveling accuracy ±3 mm / 10m

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 556, Block 16, 19L1-2 Đường số 3, KCN VSPP, P. Hòa Phú, TP. Thủ Đức, Bình Dương
ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC

Kho 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, P. Phú Châu, TP. Từ Sơn, T. Bắc Ninh
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH HÀ NỘI
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội
ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH ĐÀ NẴNG
102 Triều Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH CẦN THƠ
366 Võ Văn Kiệt, Khu Vực 5, P. An Thủy, Q. Bình Thủy, TP. Cần Thơ
ĐT: 0292 389 4358 Fax: 0292 389 4358

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH BUƠN MA THUỘT
88 Lê Đức Thọ, P. Thống Nhất, TP. Buôn Ma Thuột, T. Đắk Lắk
ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH HẢI PHÒNG
Số 01 Lê Duẩn, Di An Hoàng Huy Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng
ĐT: 0225 821 5191

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH NHÀ TRANG
Lô 56-58 đường B6, Khu đô thị Vĩnh Diễm Trung, Xã Vĩnh Ngọc, TP. Nhà Trng, T. Khánh Hòa
ĐT: 0258 220 0639

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG


CHI NHÁNH HỒ CHÍ MINH
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh
ĐT: 0283 821 5191



Green Laser Series Powered by the following

12V max slide CXT Li-ion batteries

SK40GD / SK20GD / SK10GD

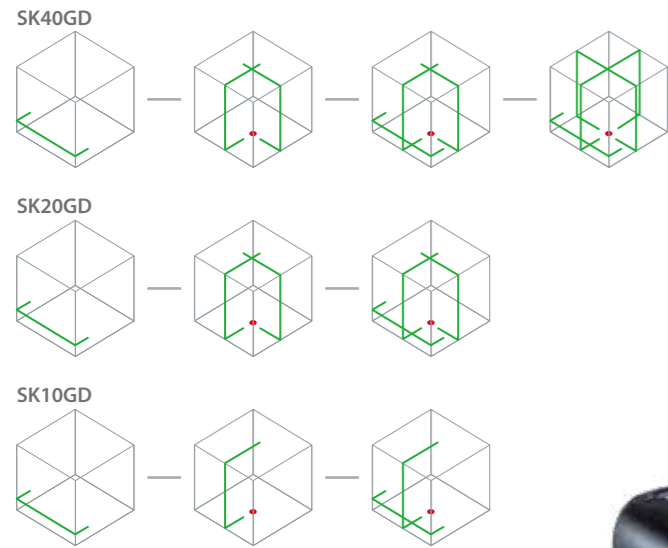


Continuous runtime
SK40GD / SK20GD / SK10GD



Leveling accuracy
 $\pm 1 \text{ mm} / 10 \text{ m}$



Stand
minimizes accidental overturning of the tool body.

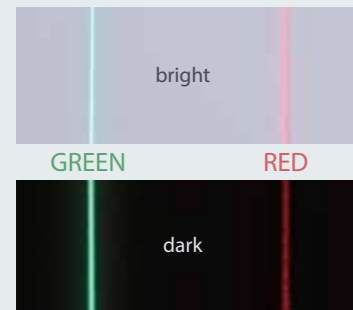

High brightness green laser
for increased visibility at bright site



Only the body of the Line laser is IP54 rated

Powered by the following sources

12Vmax CXT Li-Ion battery
BL1041B (4.0Ah)


ADP09*
loaded with eight AA batteries

BL1021B (2.0Ah)
BL1016 (1.5Ah)


*ADP09 is not available for USA market.




SK312GD / SK209GD

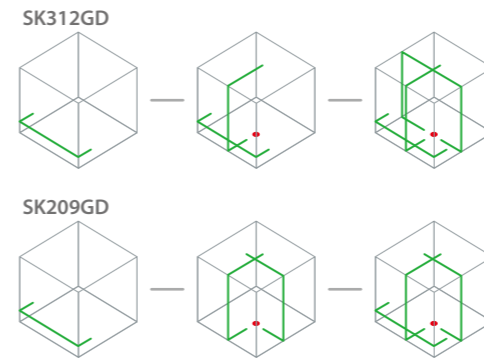

Continuous runtime
SK312GD / SK209GD

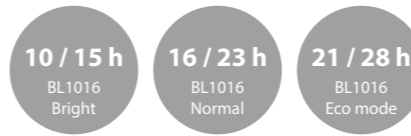

Leveling accuracy
 $\pm 1 \text{ mm} / 10 \text{ m}$

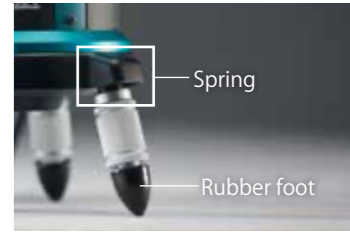


Shock absorbing construction
prevents the tool from vibration during transport




Storage case



SK106GD / SK105GD

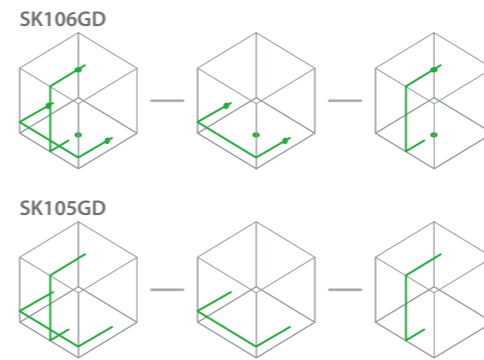

Continuous runtime
SK106GD / SK105GD



Leveling accuracy
 $\pm 3 \text{ mm} / 10 \text{ m}$

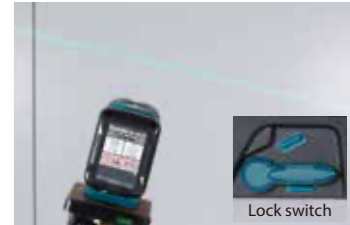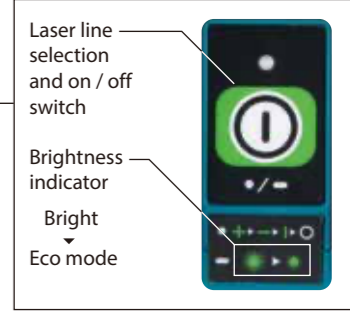

Pendulum lock
Pendulum lock enables slope incline applications for increased versatility



Adapter with magnet
for SK106GD for SK105GD



Soft bag