


High Power
Durability
Digital Communication

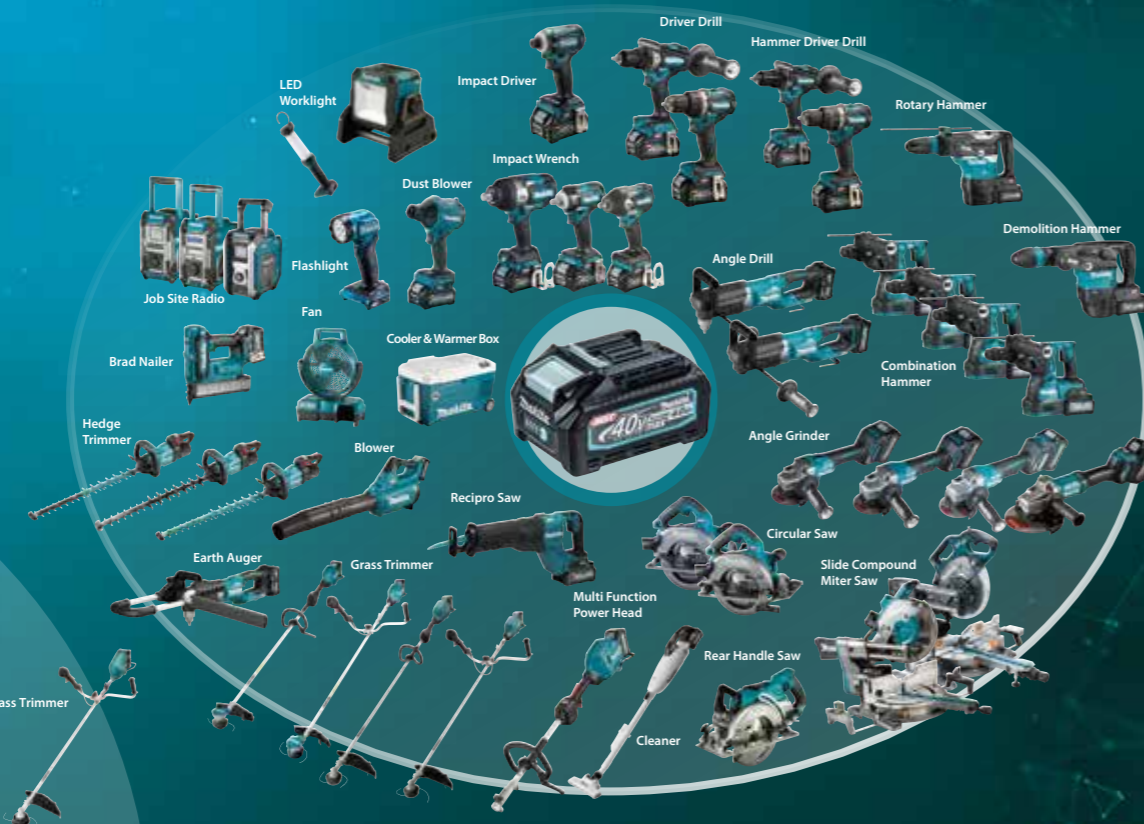

Accessories • Standard equipment

Shaft	Stainless steel (M12, L: 584mm, D: 12mm)									
Part No.	168439-5					A-43773				
Mixing Blade dia (mm)	130	150	165	135	175	175	183	190	201	220
Shape										
Part No.	A-43670	A-43686	A-43692	A-43723	A-43701	312D12-8	A-43739	A-33065	A-33071	A-43717 ●
Bolt Size (Bolt sold separate)	M8 x 18	*M8 x 25	M8 x 18	W5/16 x 16	W5/16 x 16	M8 x 16	W5/16 x 16	W5/16 x 16	W5/16 x 16	M8 x 16
Part No.	265220-5	251686-5	265220-5	265475-2	265475-2	265440-1	265475-2	265475-2	265475-2	265440-1 ●

*with Bolt

Charging Time

	Fast Charging	
	DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min
BL4025 2.5Ah	28 min	38 min
*1 BL4040 4.0Ah	45 min	67 min
*BL4050F 5.0Ah	50 min	85 min
*BL4080F 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Mixer UT001GZ / UT002GZ 240 mm (9-1/2")

	UT001G	UT002G
Variable Speed	240 mm (9-1/2")	240 mm (9-1/2")
Mechanical 2-Speed	-	2 - 13 mm (1/16 - 1/2")
Constant Speed	High / Low: 0 - 920 / 0 - 500	High / Low: 0 - 920 / 0 - 500
Soft Start	No Load Speed (RPM)	No Load Speed (RPM)
	81 dB(A)	81 dB(A)
	92 dB(A)	92 dB(A)
	Operation w/o load: 2.5 m/s ² or less	Operation w/o load: 2.5 m/s ² or less
	414 x 458 x 235 mm	404 x 458 x 235 mm
	(16-1/4 x 18 x 9-1/4")	(15-7/8 x 18 x 9-1/4")
	5.7 - 7.0 kg (12.6 - 15.4 lbs.)	5.8 - 7.2 kg (12.8 - 15.9 lbs.)

*w/o Mixing blade and Shaft
UT001GZ: battery & charger not include
UT002GZ: battery & charger not include

Standard Equipment:
UT001G: Shaft (A-43773), hex. bolt M8x16 (265440-1), mixing blade (A-43717), wrench 13 (781006-4), wrench 19 (781010-3)
UT002G: Chuck key S13 (763259-7)

The weight may differ depending on the attachment(s), including the battery cartridge.
The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

M4-052023-1

UT001G

Screw-in type shaft holder
Mixing blade, Shaft, Shaft holder
(country-specific)



UT002G

ø13mm drill chuck



Max blade diameter
ø240 mm

CÔNG TY TNHH MAKITA VIỆT NAM

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC
Khu 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, P. Phú Châu,
TP. Từ Sơn, T. Bắc Ninh.
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH ĐÀ NẴNG
102 Triều Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng.
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH CẦN THƠ
366 Võ Văn Kiệt, Khu Vực 5, P. An Thới, Q. Bình Thủy,
TP. Cần Thơ.
ĐT: 0292 389 4358 Fax: 0292 389 4358

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HẢI PHÒNG
Số 01 Lê Duẩn, Di An Hoàng Huy Riverside, P. Thượng Lý,
Q. Hồng Bàng, TP. Hải Phòng.
ĐT: 0225 863 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HÀ NỘI
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh.
ĐT: 0283 821 5191



photo: UT001G

Heavy duty operation such as mixing concrete



photo: UT001G

Mixing speed selectable according to a variety of material



High speed
0 - 920
min⁻¹

for fast mixing of medium viscous material such as mortar or paint

Possible to adjust blade speed even finer according to material.



+



Mechanical 2-speed gearing

Variable speed control by dial

Low speed
0 - 500
min⁻¹

for mixing high viscous material such as concrete



BL
MOTOR

High operating efficiency



XPT eXtreme Protection Technology



Switch cover is minimizes the chance that switch trigger or lock-on button might be stuck by adhered and hardened material.

Lock-off
Lock-on
Variable speed control by trigger

During mixing, blade speed can be adjusted by operating trigger in order to reduce the chance that material might spatter out of mixing bucket.



Battery cover is minimizes the chance that spattered material might adhere to battery.

Battery cover
Compatible battery
BL4080F, BL4050F
BL4040, BL4025
BL4020



Double D-handle with ergonomic soft grip

Allows user to operate in stable work posture with less fatigue



Soft start

Slow blade speed at the start of mixing provides:
• less reaction force to operator at start-up.
• minimized spatter of material.

Max blade diameter



photo: UT001G with Mixing blade

ø240 mm

Shank holding mechanism

UT001G:
Screw-in type shaft holder
M12/ M14 (Country-specific)



UT002G:
Drill chuck
Chuck capacity
2 - 13 mm (1/16 - 1/2")

